


UNCLASSIFIED



AD NUMBER

491 311

CLASSIFICATION CHANGES

TO

UNCLASSIFIED

FROM


CONFIDENTIAL

AUTHORITY

DASA SC-3 Memo, 4 Aug 1961

THIS PAGE IS UNCLASSIFIED

UNCLASSIFIED



AD NUMBER

491 311

NEW LIMITATION CHANGE

TO

Approved for Public Release;
Distribution Unlimited.

* * Stmt: A

* * Code: 1

FROM

N/A

AUTHORITY

Hq DNA Ltr, 11 Oct 1979.

THIS PAGE IS UNCLASSIFIED

**THIS REPORT HAS BEEN DELIMITED
AND CLEARED FOR PUBLIC RELEASE
UNDER DOD DIRECTIVE 5200.20 AND
NO RESTRICTIONS ARE IMPOSED UPON
ITS USE AND DISCLOSURE.**

DISTRIBUTION STATEMENT A

**APPROVED FOR PUBLIC RELEASE,
DISTRIBUTION UNLIMITED.**

UNCLASSIFIED

AD 491311

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION ALEXANDRIA, VIRGINIA



UNCLASSIFIED

REPRODUCTION QUALITY NOTICE

This document is the best quality available. The copy furnished to DTIC contained pages that may have the following quality problems:

- **Pages smaller or larger than normal.**
- **Pages with background color or light colored printing.**
- **Pages with small type or poor printing; and or**
- **Pages with continuous tone material or color photographs.**

Due to various output media available these conditions may or may not cause poor legibility in the microfiche or hardcopy output you receive.

☐

If this block is checked, the copy furnished to DTIC contained pages with color printing, that when reproduced in Black and White, may change detail of the original copy.


NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

WT-1487


This document consists of 40 pages.

No. 113 of 180 copies, Series A

OPERATION PLUMBBOB



NEVADA TEST SITE
MAY-OCTOBER 1957




Project 1.9

SPECTRA of GROUND SHOCKS PRODUCED by NUCLEAR DETONATIONS (U)

Classification (Controlled) changed to **UNCLASSIFIED**
By Authority: *PASACC-3 memo 4 Aug 61*
By: *H. Tolma* Date: *10 Aug 61*
Issuance Date: August 17, 1959

HEADQUARTERS FIELD COMMAND
DEFENSE ATOMIC SUPPORT AGENCY
SANDIA BASE, ALBUQUERQUE, NEW MEXICO



CASA 465 4T 74

This material contains information affecting the national defense of the United States within the meaning of the espionage laws, Title 18, U. S. C., Sec. 793 and 794, the transmission or revelation of which in any manner to an unauthorized person is prohibited by law.

UNCLASSIFIED

Inquiries relative to this report may be made to

Chief, Defense Atomic Support Agency
Washington 25, D. C.

When no longer required, this document may be
destroyed in accordance with applicable security
regulations.

DO NOT RETURN THIS DOCUMENT

*Does not contain a Comp
limitation per mem
DPSA, 19 Oct 64.
Fdc*

UNCLASSIFIED

UNCLASSIFIED

WT-1437

OPERATION PLUMBBOB-PROJECT 1.9

⑥ SPECTRA of GROUND SHOCKS PRODUCED
by NUCLEAR DETONATIONS

⑩

J. F. Halsey

M. V. Barton,

⑤

Air Force Ballistic Missile Division
Research and Development Command,
Inglewood, California

Edc

This document contains information affecting the national defense of the United States within the meaning of the espionage laws, Title 18, U.S.C., Sec. 793 and 794, the transmission or revelation of which in any manner to an unauthorized person is prohibited by law.

DASA 46541' 33

UNCLASSIFIED

ABSTRACT

The problem of defining design parameters for structures capable of withstanding blast-induced ground shock suggested the use of shock spectra as a suitable means of presenting environmental conditions. Self-contained mechanical reed gages, capable of measuring the displacement shock spectrum over a frequency range of 3 to 300 cps in any one direction, were placed on Shots Stokes, Smoky, Galileo, Whitney, and Charleston. Canisters containing the gages were normally placed with tops flush to the ground level at predicted pressure levels of approximately 100 psi; however, on Shot Smoky two additional gages were placed on the floor of an earth-covered-personnel shelter, and two gages were installed on a concrete block for Shot Whitney.

A composite plot of the results of surface gages from Shots Smoky, Galileo, and Whitney (overpressures from 116 to 146 psi) indicates some very definite trends. The displacements are two to three times higher at three cps for the vertical component (3 inches to 5 1/4 inches) than for the radial component (1 inch to 2 inches). The rate of decrease of displacement with increasing frequency is greater for the vertical component than for the radial component. A comparison of the results from the surface gages and those within the structure on Shot Smoky indicates an attenuation factor of three for vertical displacements, with no appreciable change in the radial direction.

FOREWORD

This report presents the final results of one of the 46 projects comprising the military-effect program of Operation Plumbbob, which included 24 test detonations at the Nevada Test Site in 1957.

For overall Plumbbob military-effects information, the reader is referred to the "Summary Report of the Director, DOD Test Group (Programs 1-9)," ITR-1445, which includes: (1) a description of each detonation, including yield, zero-point location and environment, type of device, ambient atmospheric conditions, etc.; (2) a discussion of project results; (3) a summary of the objectives and results of each project; and (4) a listing of project reports for the military-effects program.

CONTENTS

| | |
|--|----|
| ABSTRACT - - - - - | 4 |
| FOREWORD - - - - - | 5 |
| OBJECTIVE - - - - - | 9 |
| BACKGROUND - - - - - | 9 |
| THEORY - - - - - | |
| OPERATIONS - - - - - | 10 |
| INSTRUMENTATION - - - - - | 11 |
| Installation - - - - - | 11 |
| Recovery - - - - - | 11 |
| Calibration - - - - - | 11 |
| Data Requirements - - - - - | 13 |
| RESULTS - - - - - | 13 |
| CONCLUSIONS - - - - - | 35 |
| RECOMMENDATIONS - - - - - | 35 |
| REFERENCES - - - - - | 37 |
| FIGURES | |
| 1 Shock spectra gage - - - - - | 12 |
| 2 Typical placement of protective canister - - - - - | 12 |
| 3 Displacement shock spectrum, vertical direction; Shot Whitney, Gage 3, 146-psi overpressure, surface - - - - - | 16 |
| 4 Displacement shock spectrum, vertical direction; Shot Galileo, Gage 10, 130-psi overpressure, surface - - - - - | 16 |
| 5 Displacement shock spectrum, vertical direction; Shot Galileo, Gage 12, 130-psi overpressure, surface - - - - - | 17 |
| 6 Displacement shock spectrum, vertical direction; Shot Smoky, Gage 6, 116-psi overpressure, inside shelter - - - - - | 17 |
| 7 Displacement shock spectrum, vertical direction; Shot Smoky, Gage 7, 116-psi overpressure, surface - - - - - | 18 |
| 8 Displacement shock spectrum, vertical direction; Shot Smoky, Gage 8, 116-psi overpressure, surface - - - - - | 18 |
| 9 Displacement shock spectrum, vertical direction; Shot Stokes, Gage 2, 33-psi overpressure, surface - - - - - | 19 |
| 10 Displacement shock spectrum, vertical direction; Shot Stokes, Gage 4, 33-psi overpressure, surface - - - - - | 20 |

| | |
|---|----|
| 11 Displacement shock spectrum, vertical direction; Shot Charleston, Gage 6, 20-psi overpressure, surface ----- | 20 |
| 12 Displacement shock spectrum, vertical direction; Shot Charleston, Gage 3, 18-psi overpressure, surface ----- | 21 |
| 13 Displacement shock spectrum, vertical direction; Shot Charleston, Gage 10, 15-psi overpressure, surface ----- | 21 |
| 14 Displacement shock spectrum, vertical direction; Shot Charleston, Gage 12, 12-psi overpressure, surface ----- | 22 |
| 15 Displacement shock spectrum, radial direction; Shot Whitney, Gage 4, 146-psi overpressure, surface ----- | 22 |
| 16 Displacement shock spectrum, radial direction; Shot Galileo, Gage 11, 130-psi overpressure, surface ----- | 23 |
| 17 Displacement shock spectrum, radial direction; Shot Smoky, Gage 5, 116-psi overpressure, inside shelter ----- | 23 |
| 18 Displacement shock spectrum, radial direction; Shot Smoky, Gage 9, 116-psi overpressure, surface ----- | 24 |
| 19 Displacement shock spectrum, radial direction; Shot Stokes, Gage 1, 33-psi overpressure, surface ----- | 24 |
| 20 Displacement shock spectrum, radial direction; Shot Stokes, Gage 3, 33-psi overpressure, surface ----- | 25 |
| 21 Displacement shock spectrum, radial direction; Shot Charleston, Gage 5, 20-psi overpressure, surface ----- | 26 |
| 22 Displacement shock spectrum, radial direction; Shot Charleston, Gage 9, 18-psi overpressure, surface ----- | 26 |
| 23 Displacement shock spectrum, radial direction; Shot Charleston, Gage 11, 15-psi overpressure, surface ----- | 27 |
| 24 Displacement shock spectrum, vertical direction; Shots Whitney, Galileo and Smoky, surface ----- | 27 |
| 25 Velocity spectrum, vertical direction; Shots Whitney, Galileo and Smoky ----- | 28 |
| 26 Acceleration spectrum, vertical direction; Shots Whitney, Galileo and Smoky ----- | 29 |
| 27 Maximum acceleration versus overpressure, vertical direction; Shots Whitney, Galileo, Smoky, and Charleston ----- | 30 |
| 28 Displacement at 3 cps versus (Overpressure) ^{1/6} (Yield) ^{1/3} , vertical direction. Overpressure: p - psi. Yield: W - kilotons ----- | 31 |
| 29 Displacement shock spectrum, radial direction; Shots Whitney, Galileo and Smoky, surface ----- | 32 |
| 30 Velocity spectrum, radial direction; Shots Whitney, Galileo and Smoky ----- | 33 |
| 31 Acceleration spectrum, radial direction; Shots Whitney, Galileo and Smoky ----- | 34 |
| 32 Maximum acceleration versus overpressure, radial direction; Shots Whitney, Galileo, Smoky, and Charleston ----- | 35 |
| 33 Displacement at 3 cps versus (Overpressure) ^{1/6} (Yield) ^{1/3} , radial direction. Overpressure: p - psi. Yield: W - kilotons ----- | 36 |

TABLE 1 Displacement Shock Spectrum ----- 14



SPECTRA of GROUND SHOCKS PRODUCED by NUCLEAR DETONATIONS

OBJECTIVE

The objective of Project 1.9 was to obtain the displacement velocity and acceleration-shock spectra of ground shocks produced by nuclear devices for use in the design of missile bases and operational equipment when subjected to a similar environment. The shock spectrum is a plot showing the peak response of a linear, variable frequency oscillator (of a single degree freedom) to a specific blast wave, as a function of the frequency of the oscillator.

BACKGROUND

In the past, a limited number of measurements had been made of the ground motions caused by blasts in the form of ground acceleration, velocity, or displacement versus time records. Such information was useful in predicting the response of ground-based structures. Some of these records were analyzed by analogue or digital computers for presentation in terms of shock spectra, which resulted in a plot of the peak response of a linear, variable frequency oscillator (of single degree of freedom) as a function of the frequency of the oscillator. The information in this form was used to estimate the peak responses of single degree-of-freedom structures. More recently (Reference 1) it has been shown that estimates of the upper bounds of response of complex structures (many degrees of freedom) can also be made by means of shock spectra.

Shock spectra are of considerable interest and usefulness. Although theoretically they can be obtained by the analysis of acceleration time records, there are many practical difficulties associated with the determination of the low-frequency components both in the analyses of the ground records and the acceleration measurement. There are also difficulties in interpretation of the statistical scatter and variations of instrument damping of the acceleration measurements. Since for many design purposes, it is desirable to specify the ground motions in terms of shock spectra, a direct measurement by means of shock gages for a variety of blasts, locations and soil conditions is indicated. Shock gages have been used successfully in many fields, such as aircraft-landing impact, torpedo entry, and shipboard vibration.

THEORY

Complete discussions of the theory and application of shock spectra are given in References 1 and 2. Briefly, however, if a shock is applied to a single degree-of-freedom system, such as an idealized mass on the end of a cantilever spring, the motion of the mass, relative to the accelerated support, is governed by:

$$\ddot{q} + 2\zeta\omega\dot{q} + \omega^2q = -a(t) \quad (1.1)$$


where: q = displacement of mass (inches) relative to accelerated support
 \dot{q} = velocity of mass (in/sec)
 \ddot{q} = acceleration of mass (in/sec²)
 ϵ = ratio of damping to critical viscous damping
 ω = frequency of spring mass system (rad/sec)
 $a(t)$ = shock acceleration (in/sec²) (function of time)

The peak response in terms of displacement, velocity or acceleration of the mass to each side of the position of static equilibrium can be obtained from the solution of Equation 1.1 if the dynamic characteristics of the system are known and the acceleration input is specified. The peak responses to given shock acceleration can also be measured directly by means of a shock gage.

Formally, the peak response for systems with $\epsilon \ll 1$ is given by:

$$q_{\max}(\omega, \epsilon) = \max_{t>0} \left| \frac{1}{\omega} \int_0^t a(\tau) e^{-\epsilon\omega(t-\tau)} \sin \omega(t-\tau) d\tau \right| \quad (1.2)$$

which can be represented as a displacement shock spectrum D ,

$$D = q_{\max}(\omega, \epsilon) \quad (1.3)$$

when plotted as frequency of the oscillator versus peak displacement of the mass relative to the base which is being accelerated.

The velocity shock spectrum is defined as:

$$V = \omega D \quad (1.4)$$

which is not the true peak velocity of the mass, but is of interest in the determination of the maximum strain energy in a structure.

The acceleration shock spectrum is defined as:

$$A = \omega^2 D \quad (1.5)$$

and can be shown to be the absolute acceleration of the mass (for small damping), namely:

$$A = \max \left| \ddot{q} + a(t) \right| \quad (1.6)$$

In general, a shock gage of the type used in these tests directly measures the displacement shock spectrum given by Equation 1.3 for 10 values of frequency. Plots of the displacement-shock spectra are given as displacement D (inches) versus frequency f (cps). The velocity-shock spectra are obtained by multiplying the values of the displacement-shock spectra by their respective frequencies in radians per second to give V (inches per second) versus f (cps). The acceleration spectra are obtained by multiplying the value of the velocity spectra by frequency so that it can be represented by a plot of acceleration (A) in inches per second squared, which can be expressed as acceleration in g versus frequency.

OPERATIONS

Project 1.9 participated in Shots Stokes, Smoky, Galileo, Whitney, and Charleston.

Activities at the test site were limited to placement of instruments, recovery of records, and recovery of instruments.

INSTRUMENTATION

Twelve shock gages and protecting canisters were used on the tests.

The shock gage was a completely self-contained mechanical unit requiring no electronics or communication channels. It consisted essentially of 10 masses attached to cantilever springs which were mounted on two sides of a vertical plate as shown in Figure 1. The natural frequencies of the spring-mass systems are approximately 3, 10, 20, 40, 80, 120, 160, 200, 250, and 300 cps.

Peak responses to the shock input for each spring-mass system are obtained on polished, smoked, record plates which are marked by the movement of a stylus attached to each mass. The length of the marks (measurement of displacement) is determined by use of a microscopic micrometer in the laboratory.

Protection for the gage was obtained by placement inside a cylindrical canister two feet in diameter and approximately two feet deep. Figure 2 shows the canister used. Transmission of shock input to the gage (either in the vertical or horizontal direction) was secured by bolting the gage in the desired position to the one-inch-base plate of the canister.

Installation. The sequence of installation of gages, when used for measurements in the free-field were: (1) excavation of a 27-to-36-inch-cubical hole at the desired pressure range; (2) placement of protective canister (400 pounds total weight) as shown in Figure 2; (3) backfill around canister using select sand (concrete)¹; (4) placement of gage (130 pounds) in canister; (5) placement of polished record plates (two per gage); (6) careful placement and bolting of canister lid (rough handling could excite the gages); and (7) placement of three layers of sandbags over the lid for thermal and nuclear radiation protection.

Two canisters were affixed to the floor of a German shelter (Structure 8-3.7-8011) in the Shot Smoky area by means of anchor bolts. Two canisters were fastened to a concrete anchor block in the Shot Whitney area in a similar manner, except that availability dictated the use of $\frac{3}{4}$ -inch bolts in lieu of 1-inch bolts. As a further precaution a bridle tie-down (consisting of $\frac{1}{4}$ -by-5-inch steel plate and band) fastened by means of four bolts to the concrete was used. The canisters were surrounded by a minimum of three thicknesses of sandbags.

Recovery. Recovery of the records for free-field measurements was accomplished by: (1) moving or sweeping sandbag debris from cover; (2) unbolting and removing the lid; and (3) removing wing-nut from gage and slipping out polished record plates in a careful manner.

Records were recovered from all gages installed, except those two in the Shot Whitney area which were affixed to the anchor block. Those canisters and gages were found at a point some 30 feet from their original position, and examination revealed that the anchor bolts in the concrete had either pulled out or had sheared off. Those canisters and gages were considered a total loss. Two free-field measurements were obtained in this area.

Calibration. While the computed design natural frequency of each spring mass was

¹ Compaction was obtained through use of hand tamping and water. It is estimated that a compaction of 90 percent of maximum density at optimum moisture content was obtained.

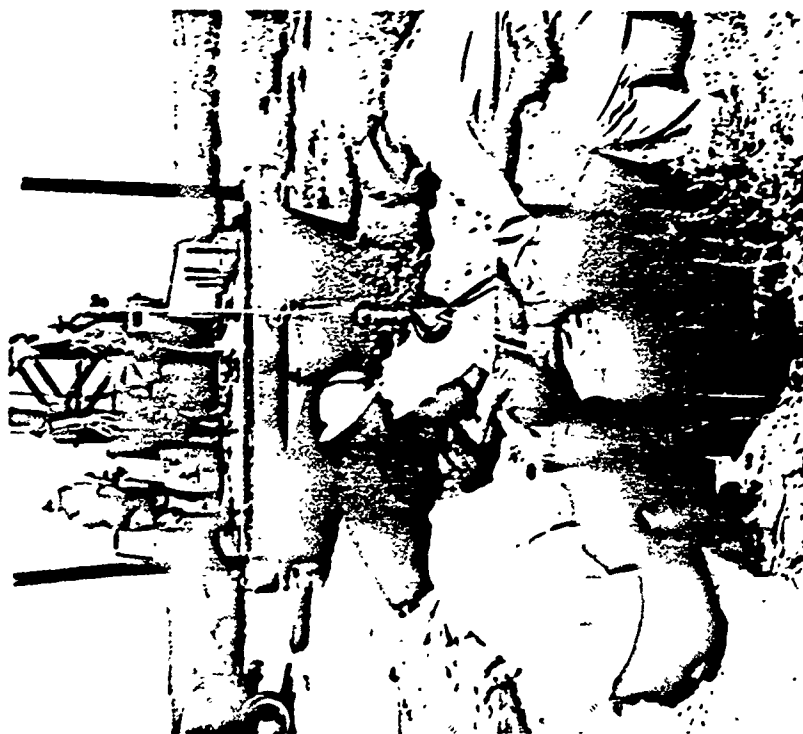


Figure 2. Typical placement of protective canister.

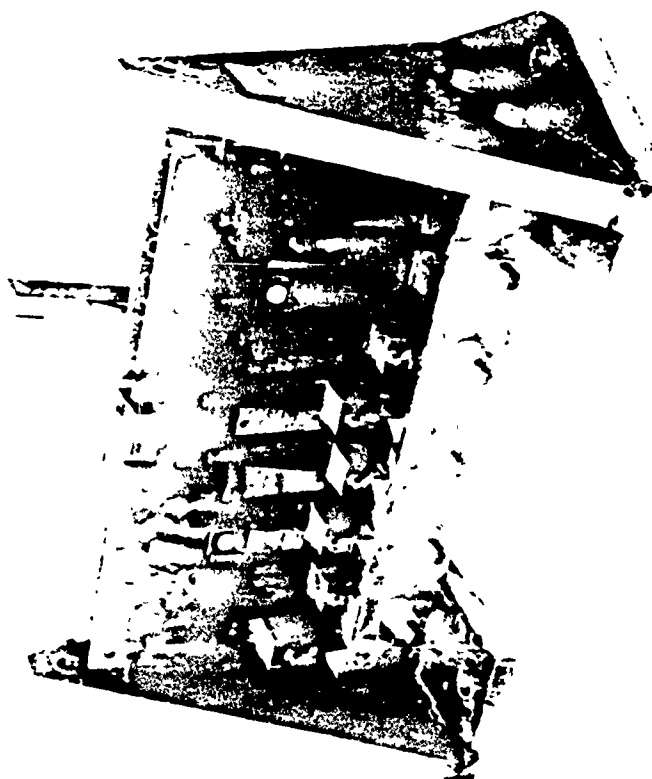


Figure 1 Shock spectra gage.

known, calibration of each reed on each gage was required so that any variation in fabrication and assembly would be accounted for.

The natural frequency was determined by use of a shake table for excitation, with frequency sweep and resonant points being obtained through use of a Strobotac instrument. The degree of damping of each spring-mass system was established by obtaining a trace of the light reflected (from a source) by a mirror attached to the mass, and noting the decay of the trace during free oscillation. Damping was found to be 0.5 percent.

Data Requirements. The specification of design parameters as discussed above and in References 1 and 2 required that the shock spectra be obtained for the preselected overpressure level of 100 psi. Statistical considerations, variable ground conditions and placement suggested the use of gages on more than one event.

With these ground rules in mind it was decided to use Shot Stokes as a preliminary test of the instrumentation. Two radial and two vertical gages were placed at a point 170 feet east of ground zero where they experienced an overpressure of 33 psi.

Shot Smoky afforded the opportunity of placement of gages both within a structure, and in the free-field at approximately the 100-psi level. One radial and one vertical gage were placed within Structure 8-3.7-8011 at 1,005 feet from ground zero. Adjacent to the structure and separated by a distance between gages of five feet, one radial and two vertical gages were placed. The recorded overpressure level was 116 psi.

At a point 650 feet north of Shot Galileo ground zero and separated by five feet, one radial and two vertical gages were placed with a resulting overpressure level of 130 psi.

The desire to obtain the shock spectra of the acceleration induced in a large mass of concrete led to the installation of one radial and one vertical gage 600 feet west of Shot Whitney ground zero where one of the Operation Teapot tower guy cable anchor blocks was located. On the same radius, five feet from the block and separated by the same distance, one radial and one vertical gage were placed. Extremely hard excavation led to use of power equipment, so that the canister top was approximately 18 inches below ground level instead of being flush as in the other cases. The overpressure level was 146 psi.

Locations for Shot Charleston were dictated by the desire to obtain measurements over a range of overpressure levels which could possibly lead to a correlation of the shock spectra with overpressure level. Therefore, using calculations from an expected high yield of the device, gages were placed 1,100, 1,300, 1,500, and 2,300 feet south of ground zero. Anticipated overpressure levels were 100, 75, 50, and 25 psi at the respective locations, but a low yield of the device gave levels of only 20, 18, 15, and 12 psi.

Ballistic Research Laboratories (BRL) furnished overpressure determinations for all shots.

RESULTS

The experimentally determined peak-displacement of the masses in the vertical and radial directions of single degree-of-freedom-systems for ten frequencies and 0.5 percent damping are presented as Table 1 and graphs Figures 3 through 24.

With the exception of the two measurements taken inside a shelter (Shot Smoky gages 5 and 6, Figures 17 and 6), all measurements were at or near (within three feet) ground surface.

Displacement-shock spectra in the vertical direction ranged from slightly less than six inches to less than 0.001 inch. Comparable values for the radial directions were two inches to 0.0007 inch. The accuracy of measurements was probably better at the low fre-

TABLE 1 DISPLACEMENT SHOCK SPECTRUM

 f , natural frequency; D, peak displacement

| Radial Direction | | | | Vertical Direction | | | |
|------------------|----|-----|----|--------------------|----|-----|----|
| f | D | f | D | f | D | f | D |
| cps | in | cps | in | cps | in | cps | in |

Shot Stokes, Surface, 33-psi Overpressure

| Gage 1 | | Gage 3 | | Gage 2 | | Gage 4 | |
|--------|--------|--------|--------|--------|--------|--------|--------|
| 2.56 | — | 2.66 | 0.199 | 2.56 | 0.713 | 2.74 | 0.516 |
| 8.92 | 0.137 | 8.87 | 0.0260 | 8.92 | 0.509 | 9.66 | 0.440 |
| 22.0 | 0.0318 | 22.2 | 0.0248 | 22.0 | 0.101 | 20.4 | 0.165 |
| 36.0 | 0.0451 | 36.5 | 0.0093 | 36.0 | 0.0498 | 32.8 | 0.0633 |
| 90.0 | 0.0231 | 92.0 | 0.0074 | 90.0 | 0.0395 | 88.0 | 0.0560 |
| 134 | 0.0056 | 132 | 0.0018 | 131 | 0.0128 | 133 | 0.0309 |
| 184 | 0.0121 | 176 | 0.0017 | 179 | 0.0088 | 185 | 0.0154 |
| 228 | 0.0027 | 224 | 0.0020 | 209 | 0.0030 | 221 | 0.0066 |
| 269 | 0.0065 | 279 | — | 266 | 0.0027 | 265 | 0.0026 |
| 339 | — | 312 | — | 303 | 0.0033 | 293 | 0.0012 |

Shot Smoky, Inside Shelter, 116-psi Overpressure

| Gage 5 | | Gage 6 | |
|--------|--------|--------|--------|
| 2.72 | 2.25 | 2.54 | 1.62 |
| 9.37 | 0.453 | 8.72 | 0.906 |
| 22.3 | 0.113 | 21.9 | 0.336 |
| 36.9 | 0.0451 | 37.0 | 0.0744 |
| 95.0 | 0.0185 | 92.0 | 0.0167 |
| 138 | 0.0101 | 138 | 0.0099 |
| 184 | 0.0099 | 185 | 0.0034 |
| 234 | 0.0041 | 246 | 0.0051 |
| 285 | 0.0022 | 280 | 0.0039 |
| 296 | 0.0031 | 363 | 0.0038 |

Shot Smoky, Surface, 116-psi Overpressure

| Gage 9 | | Gage 7 | | Gage 8 | |
|--------|--------|--------|--------|--------|--------|
| 2.55 | 1.95 | 2.60 | 5.45 | 2.53 | 4.53 |
| 9.12 | 0.359 | 8.56 | 1.52 | 8.82 | 1.46 |
| 22.4 | 0.189 | 22.4 | 0.845 | 22.6 | 0.525 |
| 33.9 | 0.131 | 37.4 | 0.254 | 37.1 | 0.205 |
| 93.0 | 0.0227 | 91.0 | 0.132 | 93.0 | 0.103 |
| 107 | 0.0149 | 132 | 0.0673 | 137 | 0.0450 |
| 181 | 0.0107 | 187 | 0.0221 | 180 | 0.0199 |
| 203 | 0.0042 | 238 | 0.0106 | 236 | 0.0122 |
| 293 | 0.0055 | 280 | 0.0112 | 294 | 0.0055 |
| 357 | 0.0027 | 335 | 0.0066 | 328 | 0.0066 |

Shot Galileo, Surface, 130-psi Overpressure

| Gage 11 | | Gage 10 | | Gage 12 | |
|---------|--------|---------|--------|---------|--------|
| 2.35 | 0.653 | 2.48 | 4.10 | 2.47 | 4.25 |
| 8.63 | 0.377 | 8.26 | 0.946 | 8.23 | 1.22 |
| 22.5 | 0.164 | 22.7 | 0.320 | 21.0 | 0.475 |
| 36.5 | 0.0453 | 37.1 | 0.314 | 35.0 | 0.280 |
| 95.0 | 0.0349 | 94.0 | 0.140 | 94.0 | 0.121 |
| 138 | 0.0194 | 138 | 0.0441 | 136 | 0.0267 |
| 196 | 0.0103 | 187 | 0.0446 | 178 | 0.0442 |
| 237 | 0.0032 | 234 | 0.0098 | 229 | 0.0161 |
| 294 | 0.0046 | 272 | 0.0139 | 300 | 0.0121 |
| 317 | 0.0029 | 365 | 0.0046 | 339 | 0.0053 |

TABLE 1 CONTINUED

1. natural frequency, D, peak displacement

| Radial Direction | | | | Vertical Direction | | | |
|------------------|----|-----|----|--------------------|----|-----|----|
| f | D | f | D | f | D | f | D |
| cps | in | cps | in | cps | in | cps | in |

Shot Whitney, Surface, 146-psi Overpressure

| Gage 4 * | | | | Gage 3 * | | | |
|----------|--------|--|--|----------|--------|--|--|
| 2.71 | 1.60 | | | 2.66 | 3.10 | | |
| 9.64 | 0.260 | | | 8.97 | 1.47 | | |
| 20.4 | 0.119 | | | 22.2 | 0.788 | | |
| 32.8 | 0.0331 | | | 36.5 | 0.348 | | |
| 86.0 | 0.0187 | | | 92.0 | 0.141 | | |
| 131 | 0.0118 | | | 132 | 0.0992 | | |
| 185 | 0.0088 | | | 176 | 0.0402 | | |
| 220 | 0.0064 | | | 227 | 0.0090 | | |
| 269 | 0.0026 | | | 284 | 0.0152 | | |
| 314 | 0.0054 | | | 330 | 0.0080 | | |

Shot Charleston, Surface †

| Gage 5 (20-psi overpressure) | | Gage 9 (18-psi overpressure) | | Gage 6 (20-psi overpressure) | | Gage 8 (18-psi overpressure) | |
|---------------------------------|--------|---------------------------------|--------|---------------------------------|--------|---------------------------------|--------|
| 2.72 | 0.263 | 2.55 | 0.265 | 2.54 | — | 2.53 | 0.728 |
| 9.37 | 0.111 | 9.12 | 0.0838 | 8.72 | 0.280 | 8.62 | 0.259 |
| 22.3 | 0.0900 | 22.4 | 0.0691 | 21.9 | 0.221 | 22.6 | 0.194 |
| 36.9 | 0.0404 | 33.9 | — | 37.0 | — | 37.1 | 0.0828 |
| 95.0 | 0.0190 | 93.0 | 0.0096 | 92.0 | 0.0246 | 93.0 | 0.0208 |
| 138 | 0.0100 | 107 | 0.0050 | 138 | 0.0093 | 137 | 0.0048 |
| 184 | 0.0014 | 181 | 0.0023 | 185 | 0.0062 | 180 | 0.0025 |
| 234 | 0.0030 | 203 | 0.0026 | 246 | 0.0023 | 236 | 0.0015 |
| 285 | 0.0026 | 293 | 0.0019 | 280 | 0.0023 | 294 | 0.0015 |
| 296 | 0.0020 | 357 | 0.0009 | 363 | 0.0007 | 328 | 0.0016 |

| Gage 11 (15-psi overpressure) | | Gage 10 (15-psi overpressure) | | Gage 12 (12-psi overpressure) | |
|----------------------------------|--------|----------------------------------|--------|----------------------------------|--------|
| 2.35 | 0.879 | 2.48 | 0.407 | 2.47 | 0.492 |
| 8.63 | 0.262 | 8.26 | 0.163 | 8.23 | 0.177 |
| 22.5 | 0.195 | 22.7 | 0.0726 | 21.0 | 0.207 |
| 36.5 | 0.0804 | 37.1 | 0.0231 | 35.0 | 0.0786 |
| 95.0 | 0.0246 | 94.0 | — | 94.0 | 0.0193 |
| 138 | 0.0033 | 138 | — | 136 | 0.0101 |
| 186 | 0.0020 | 187 | — | 178 | 0.0053 |
| 237 | 0.0019 | 234 | — | 229 | 0.0005 |
| 294 | 0.0011 | 272 | — | 300 | — |
| 317 | 0.0007 | 365 | 0.0009 | 339 | 0.0006 |

* Canister tops were about 18 inches below ground level in hard ground. Two other gages bolted to concrete pads in the same vicinity were knocked loose and data was lost.

† Tangential direction for Gage 7 (20-psi overpressure): insignificant displacement.

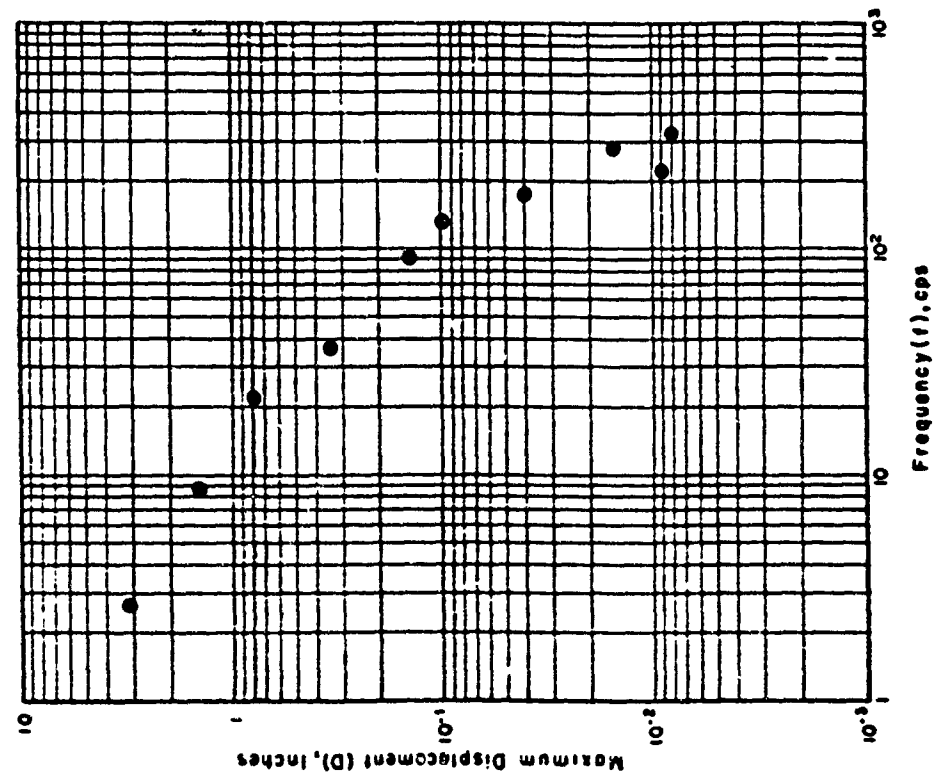


Figure 3 Displacement shock spectrum, vertical direction; Shot Whitney, Gage 3, 140-pal overpressure, surface.

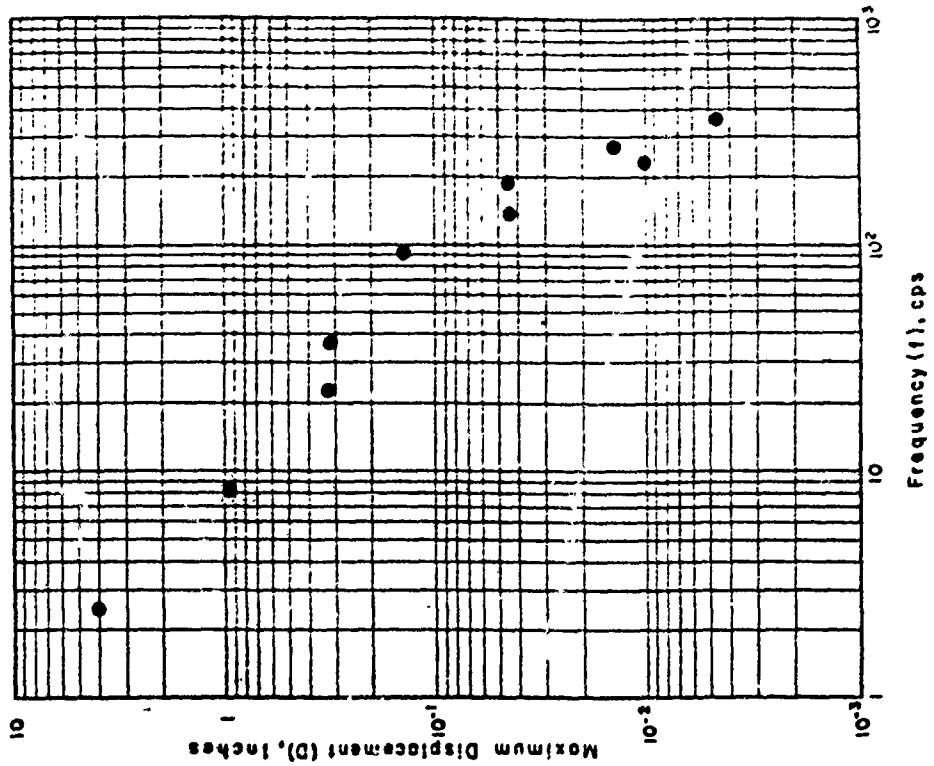


Figure 4 Displacement shock spectrum, vertical direction; Shot Galileo, Gage 10, 130-pal overpressure, surface.

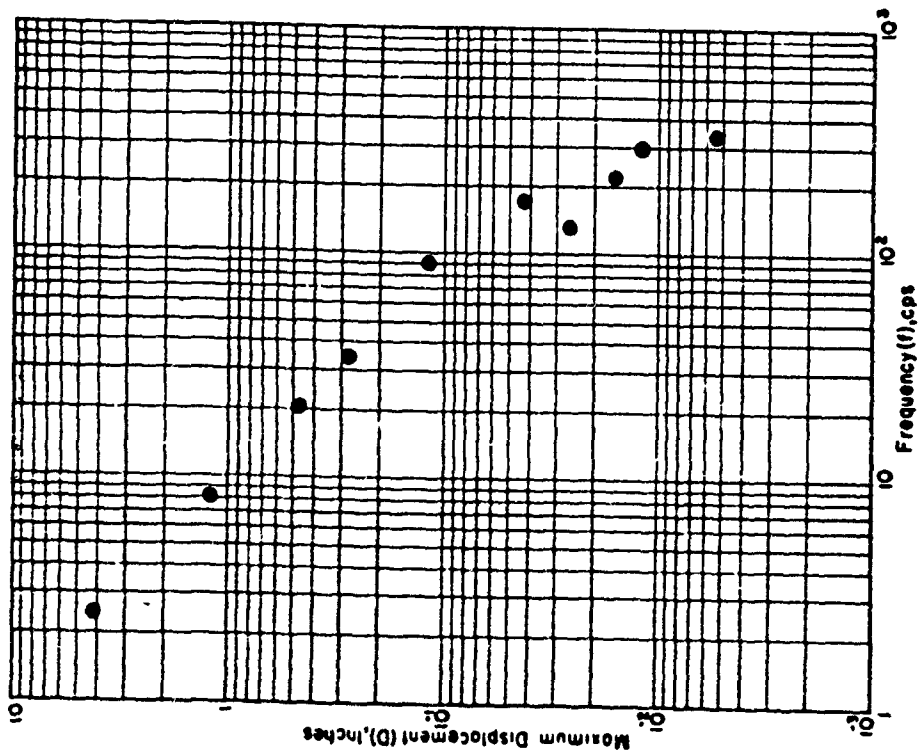


Figure 5 Displacement shock spectrum, vertical direction, Shot Galileo, Gage 12, 100-psf overpressure, surface.

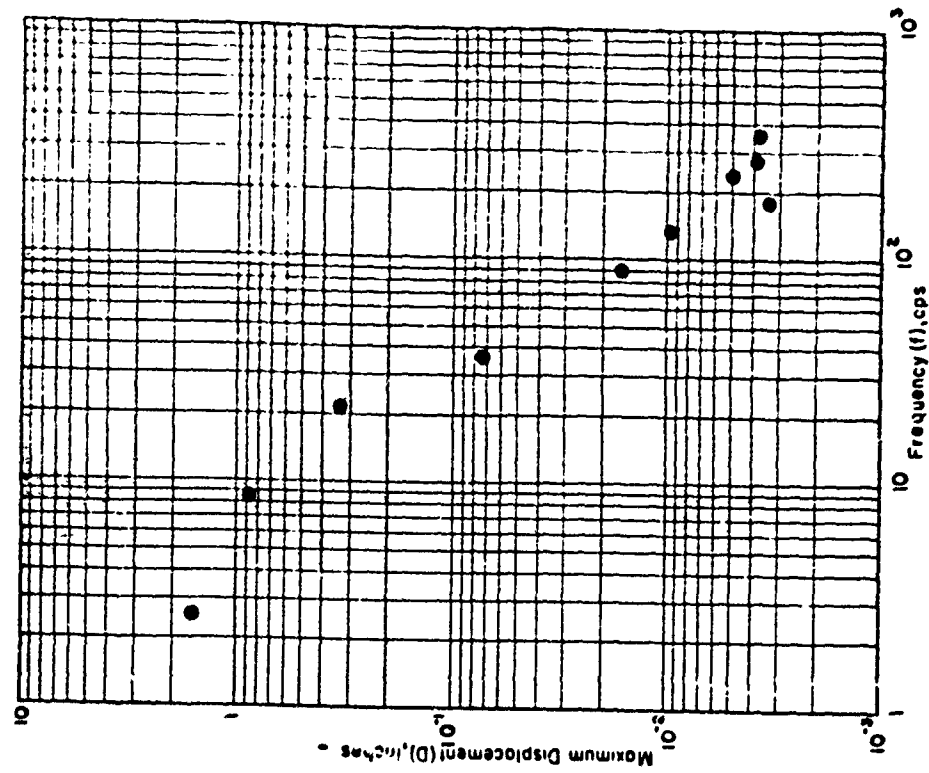


Figure 6 Displacement shock spectrum, vertical direction, Shot Smoky, Gage 6, 100-psf overpressure, inside shelter.

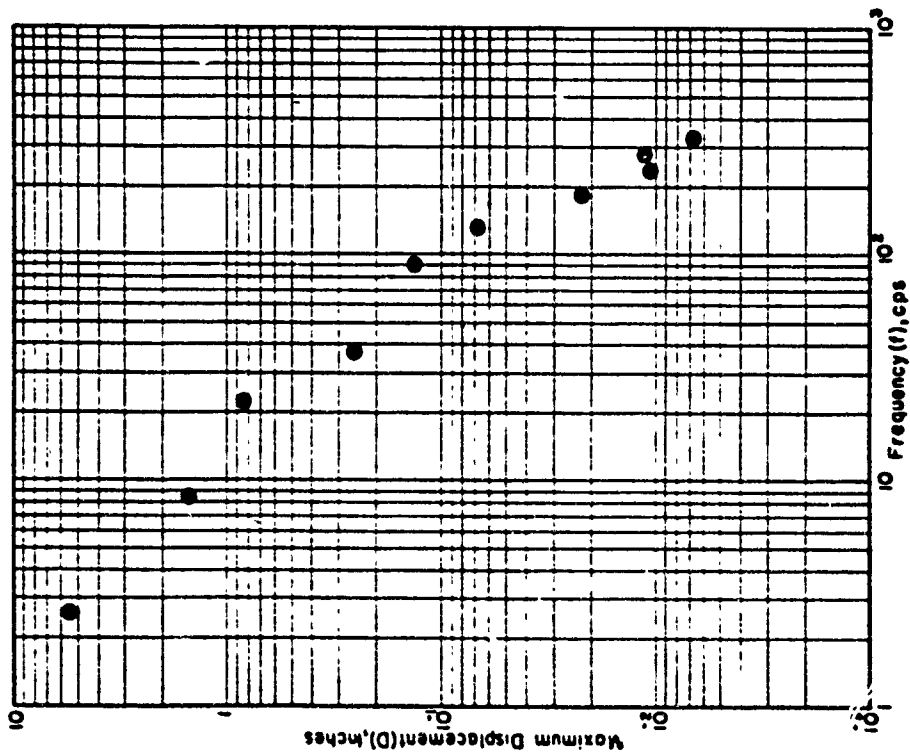


Figure 7 Displacement shock spectrum, vertical direction; Shot Smoky, Gage 7, 110-psi overpressure, surface.

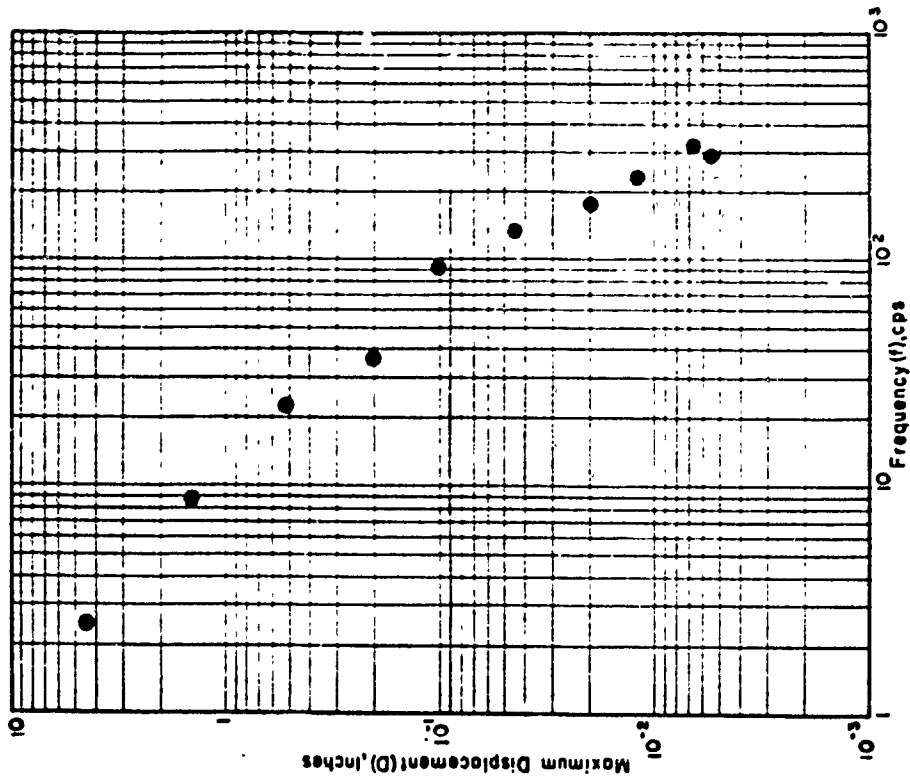


Figure 8 Displacement shock spectrum, vertical direction; Shot Smoky, Gage 8, 110-psi overpressure, surface.

quencies, (less than 10 cps) because of the difficulty of reading the small record marks at the higher frequencies. The records obtained from Shot Stokes are considered most unreliable, because this shot was used as a preliminary test for the instruments using a different type of record plate, which required the scratching on a dyed surface, later re-

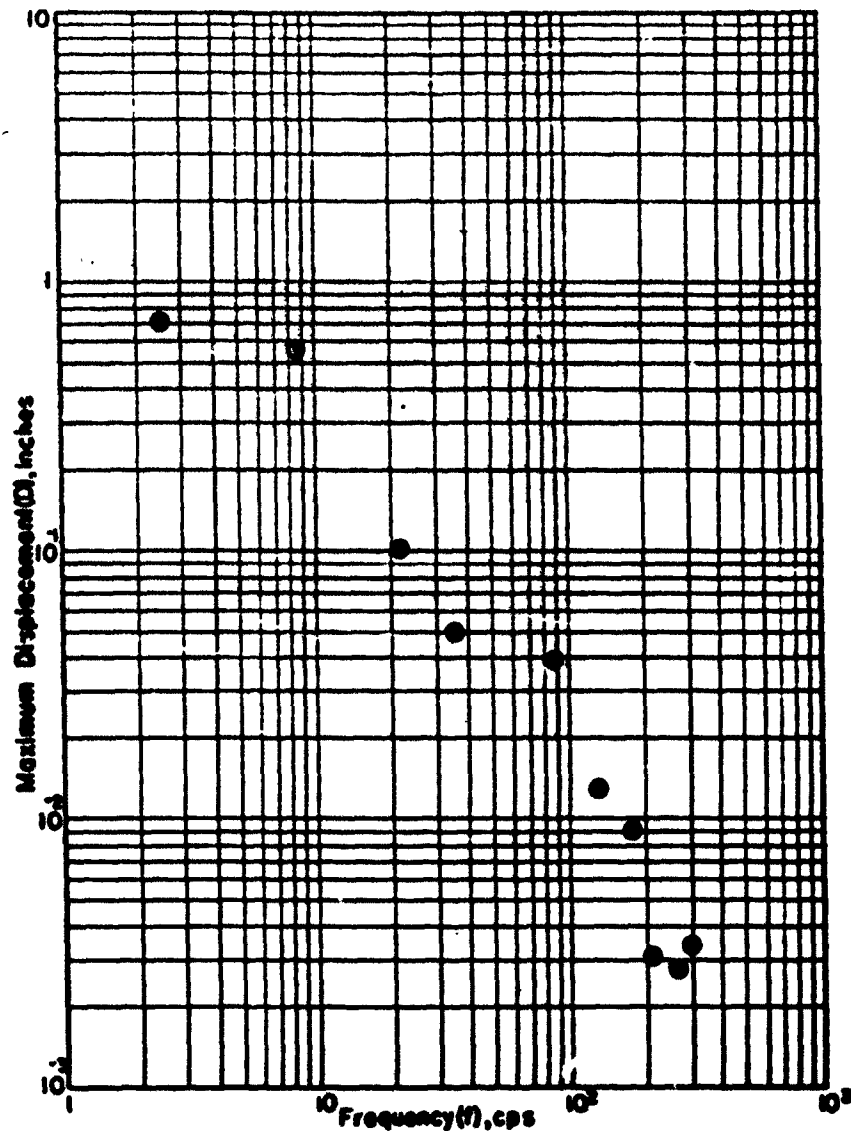


Figure 9 Displacement shock spectrum, vertical direction; Shot Stokes, Gage 2, 33-psi overpressure, surface

placed by a smoked surface. The results from Shot Charleston should also be considered with caution because the unexpected low yield produced lower impulses than the gages were designed to record accurately.

Perhaps of most interest were the combined plots of results for similar overpressure regions (116 to 146 psi) of the displacement, velocity and acceleration shock spectra in

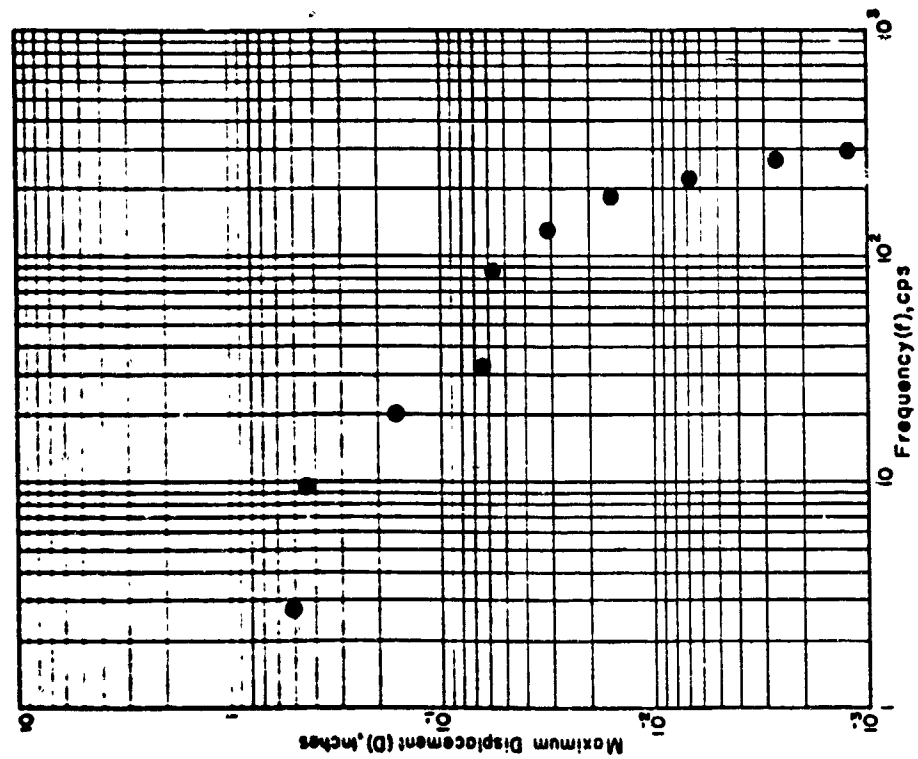


Figure 10 Displacement shock spectrum, vertical direction, Shot Stokes, Gage 4, 33-psi overpressure, surface.

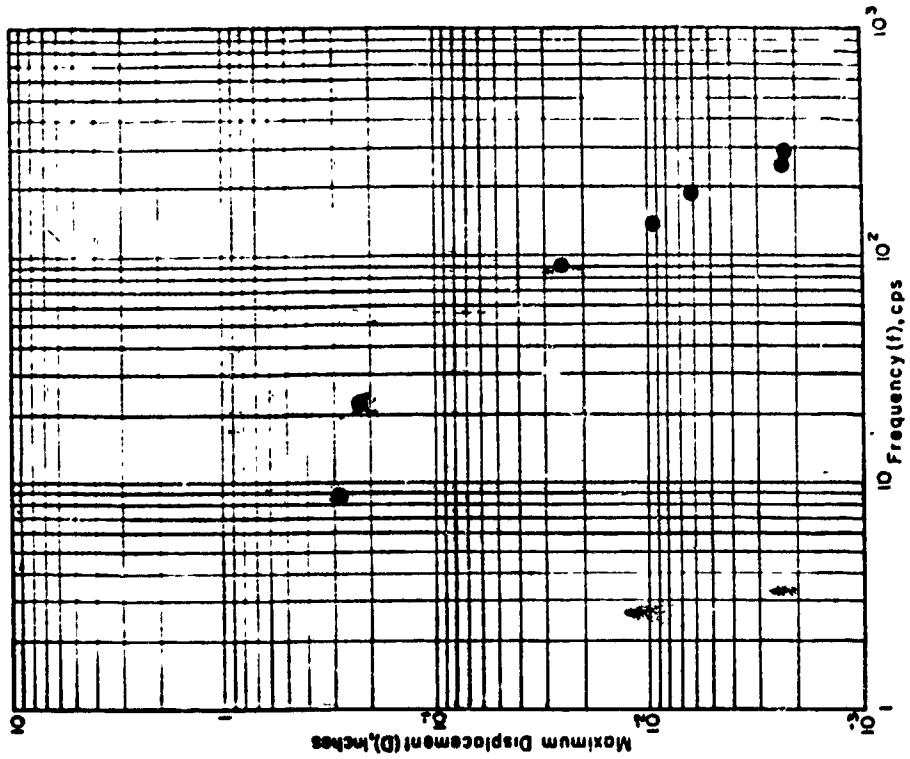


Figure 11 Displacement shock spectrum, vertical direction, Shot Charleston, Gage 6, 20-psi overpressure, surface.

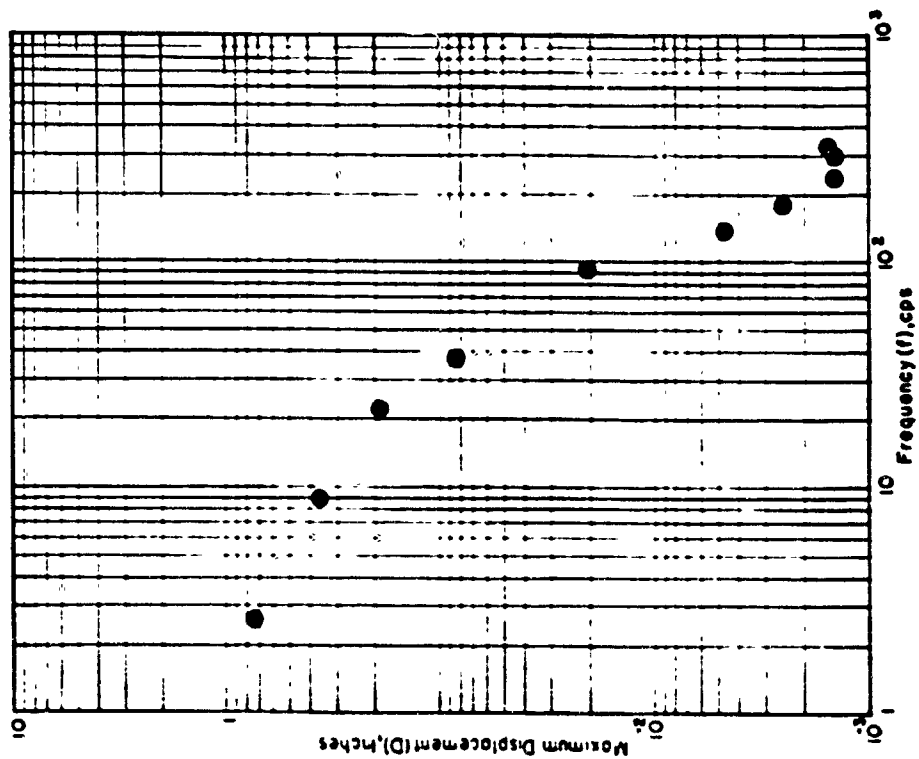


Figure 12 Displacement shock spectrum, vertical direction; Shot Charleston, Gage 8, 10-lb pressure, surface

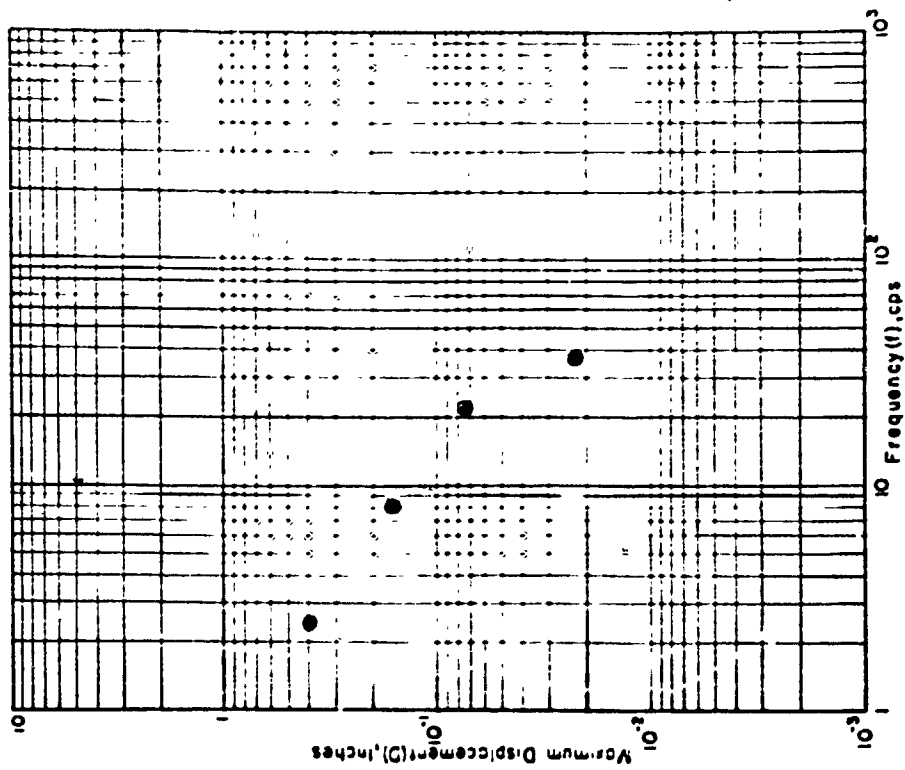


Figure 13 Displacement shock spectrum, vertical direction; Shot Charleston, Gage 10, 15-lb pressure, surface

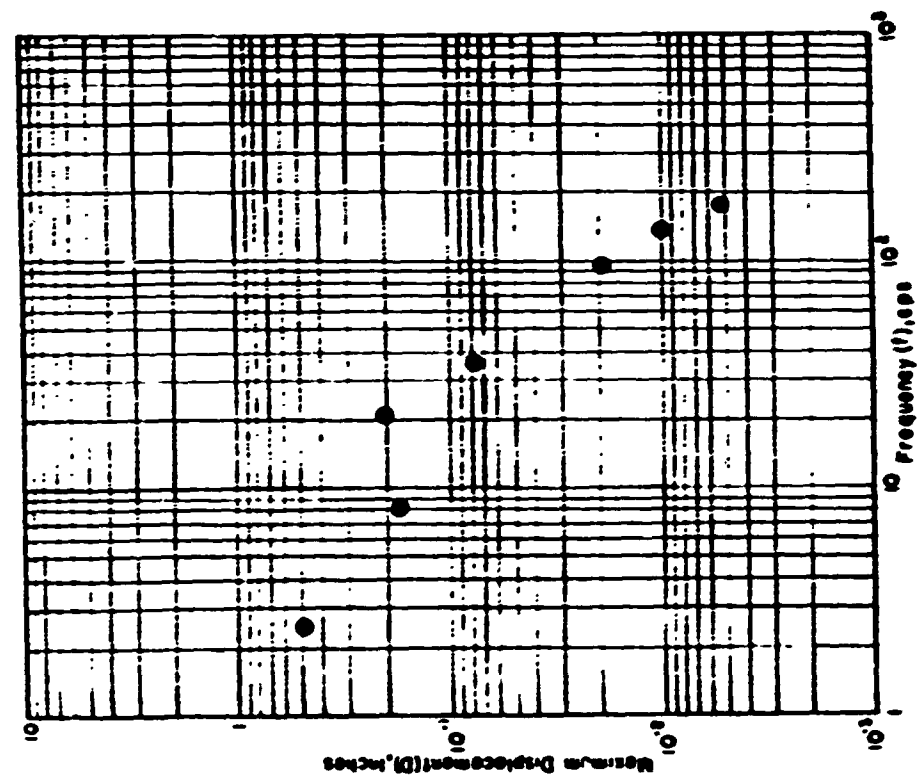


Figure 14 Displacement shock spectrum, vertical direction; Mt. Charleston, Gage 12, 12-in. overpressure, surface.

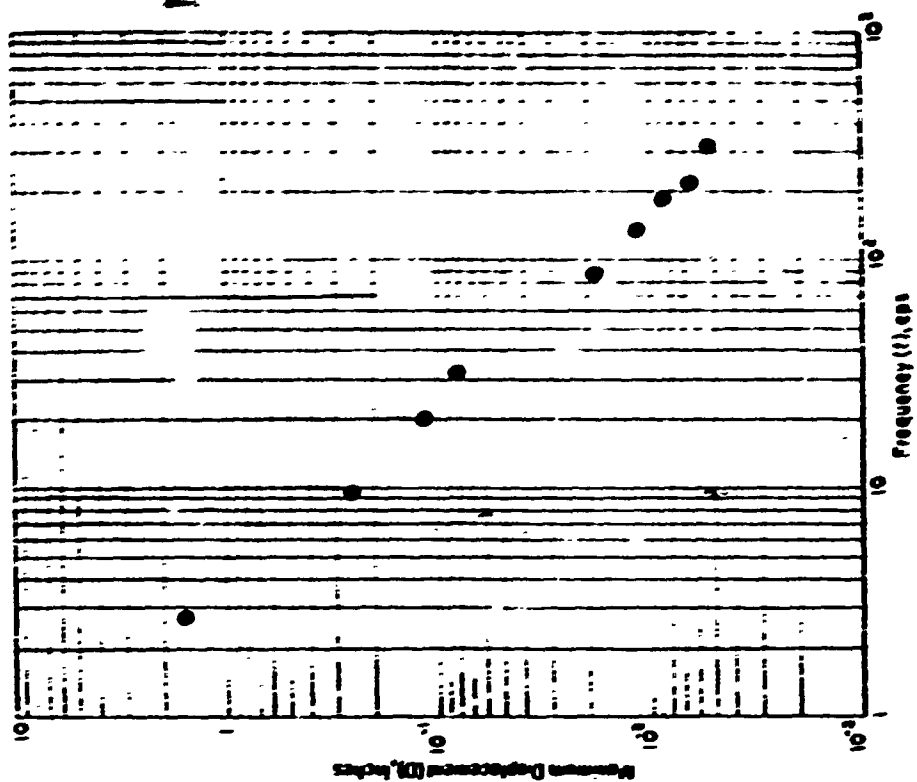


Figure 16 Displacement shock spectrum, radial direction; Mt. Whitney, Gage 4, 145-psi overpressure, surface.

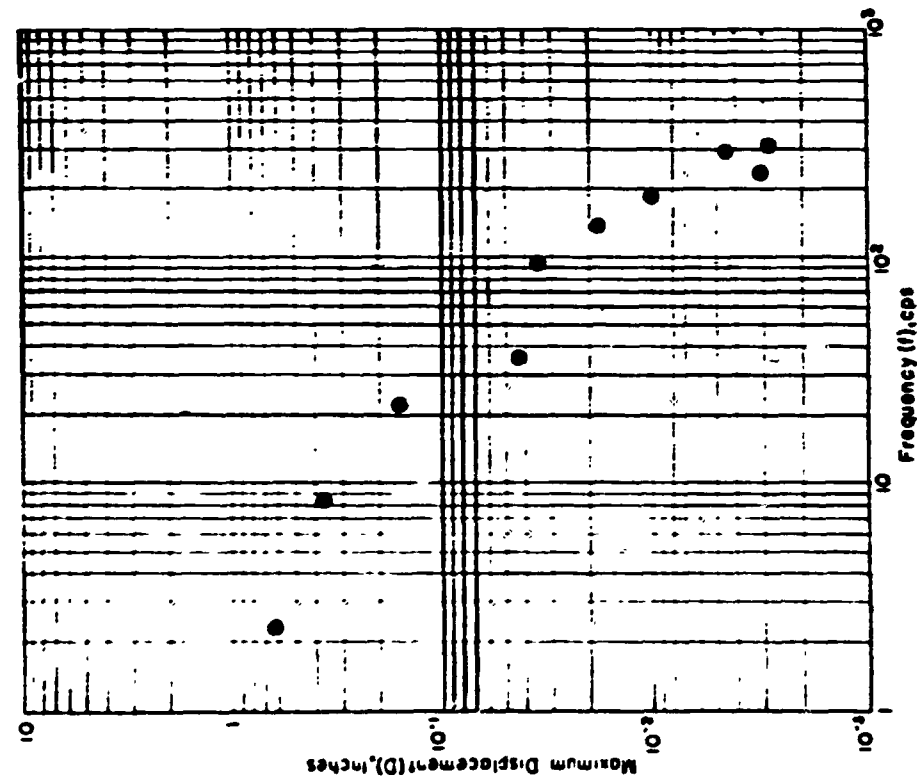


Figure 18 Displacement shock spectrum, radial direction; Shot Galileo,
Gage 11, 110-psi overpressure, surface

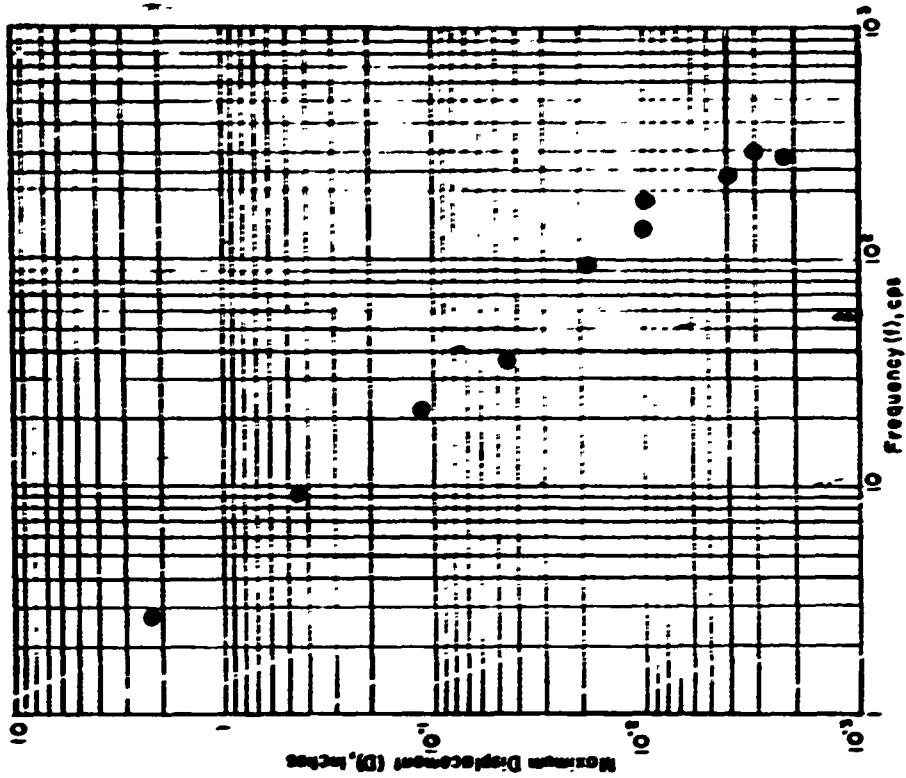


Figure 17 Displacement shock spectrum, radial direction, Shot Blinch,
Gage 5, 110-psi overpressure, inside shelter

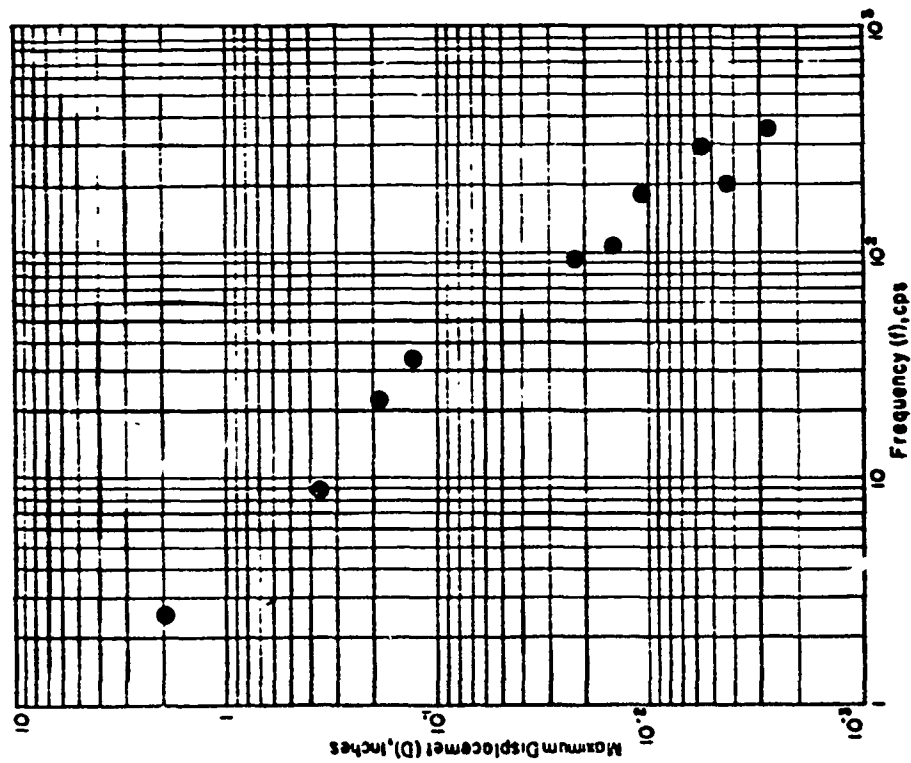


Figure 18 Displacement shock spectrum, radial direction; Shot Smoky, Gage 8, 116-pai overpressure, surface.

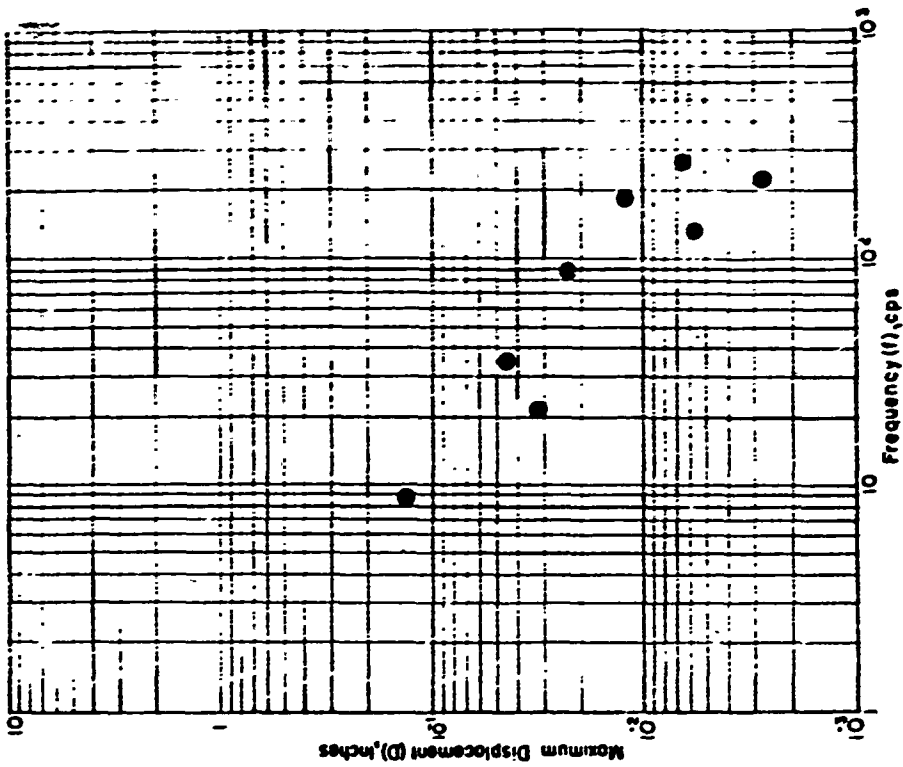


Figure 19 Displacement shock spectrum, radial direction; Shot Stokes, Gage 1, 33-pai overpressure, surface.

the vertical and radial directions, (Figures 25 through 27 and 29 through 31). Although there was some scatter in the data for the displacement shock spectra, as might be expected from the statistical nature of the phenomena, definite trends were indicated. The rate of decrease with frequency was greater for the vertical component than the radial

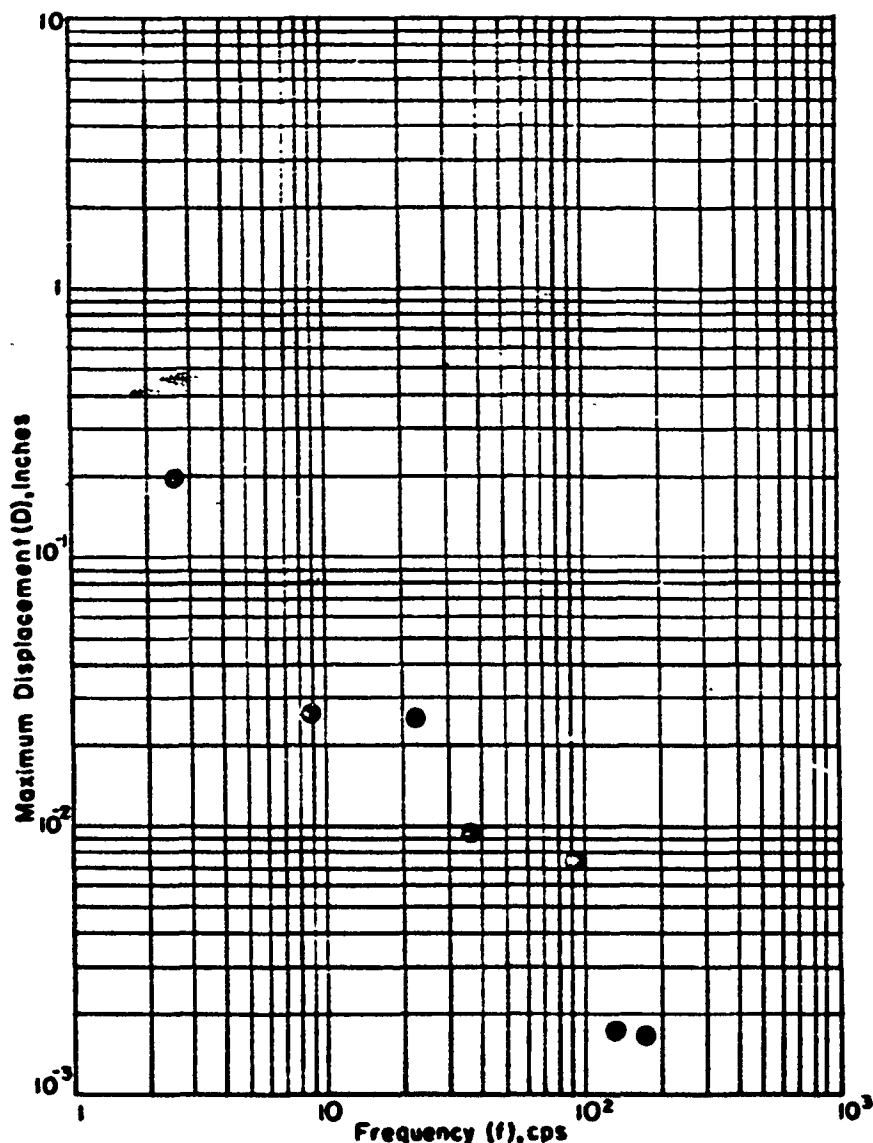


Figure 20 Displacement shock spectrum, radial direction; Shot Stokes, Gage 3, 33-psi overpressure, surface.

component. The displacements were two to three times higher for the vertical component than for the radial component at the low frequencies.

The scatter of data became more pronounced for the velocity and acceleration spectra as expected. Here again, however, certain trends were established. For the conditions of the tests it was evident that for the vertical component the values of the velocity reached

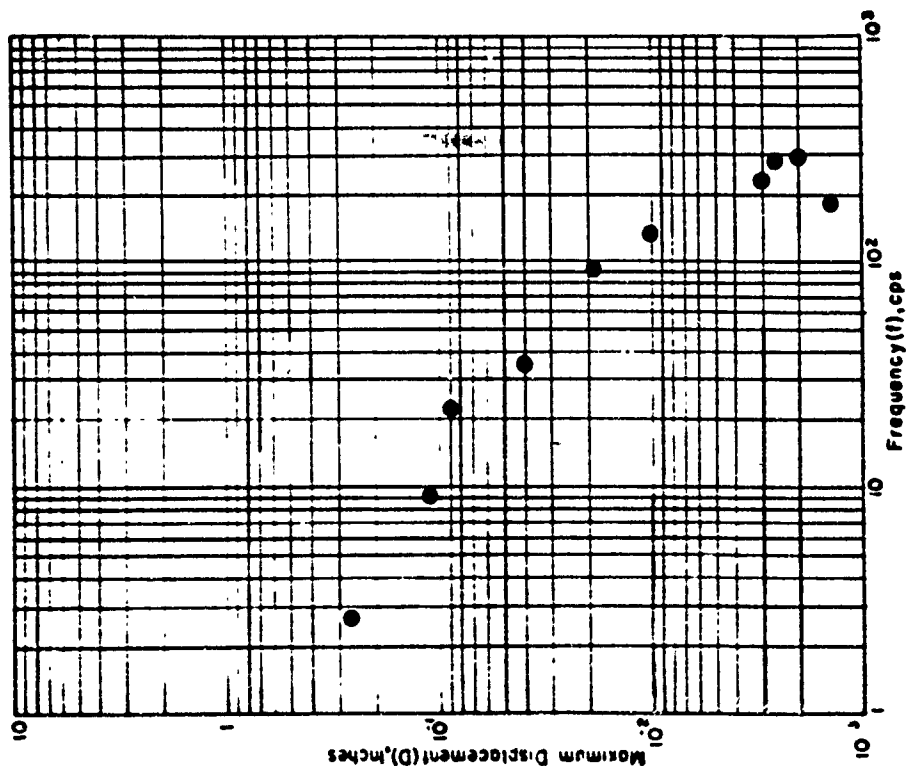


Figure 21 Displacement shock spectrum, radial direction; Shot Charleston, Gugo 5, 30-pai overpressure, surface.

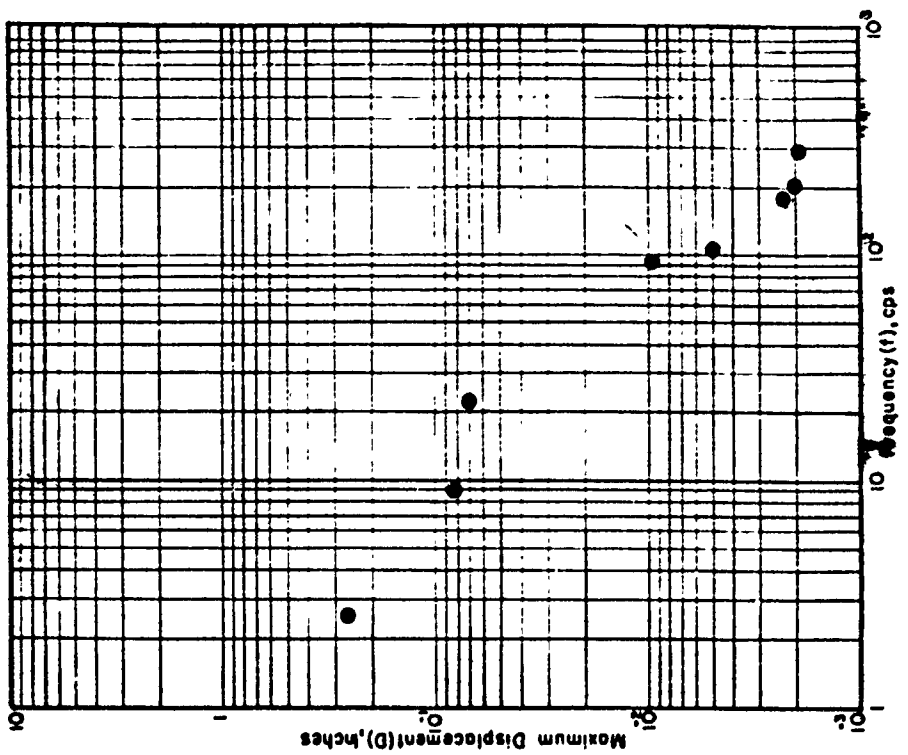


Figure 22 Displacement shock spectrum, radial direction; Shot Charleston, Gugo 9, 15-pai overpressure, surface.

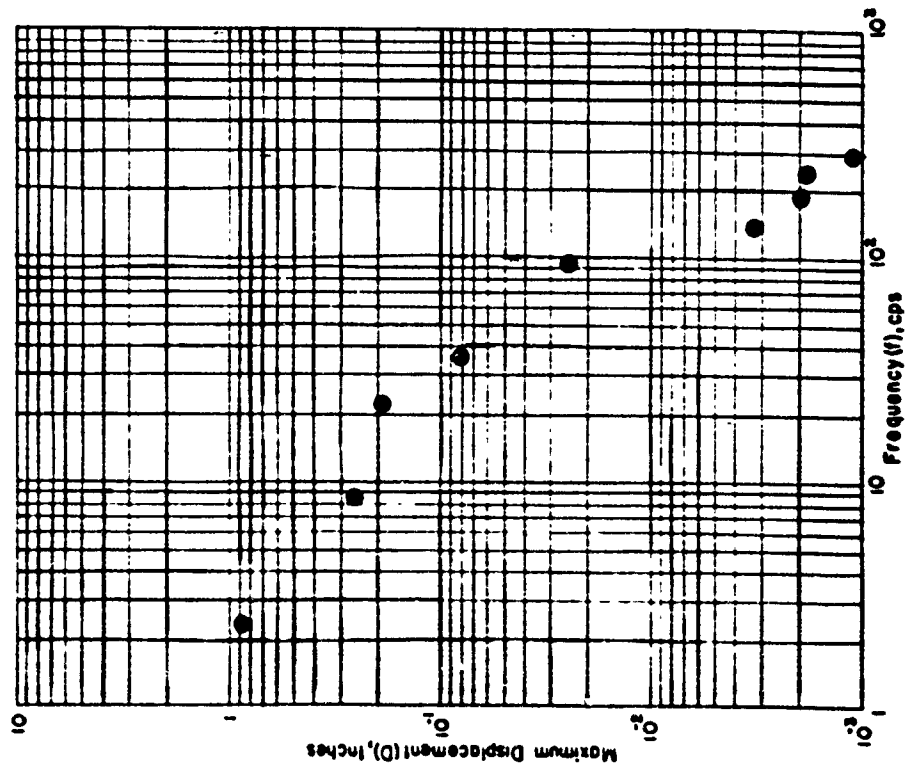


Figure 23 Displacement shock spectrum, radial direction; Shot Charlston, Gage 11, 15-psi overpressure, surface.

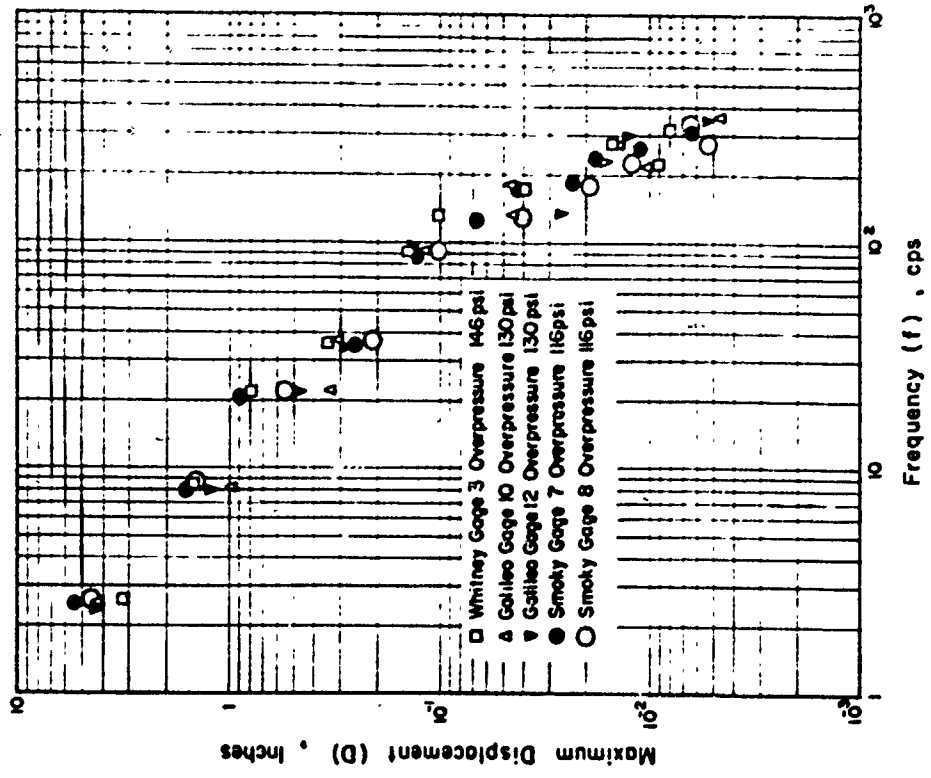


Figure 24 Displacement shock spectrum, vortical direction; Shots Whitney, Galileo and Smoky, surface.

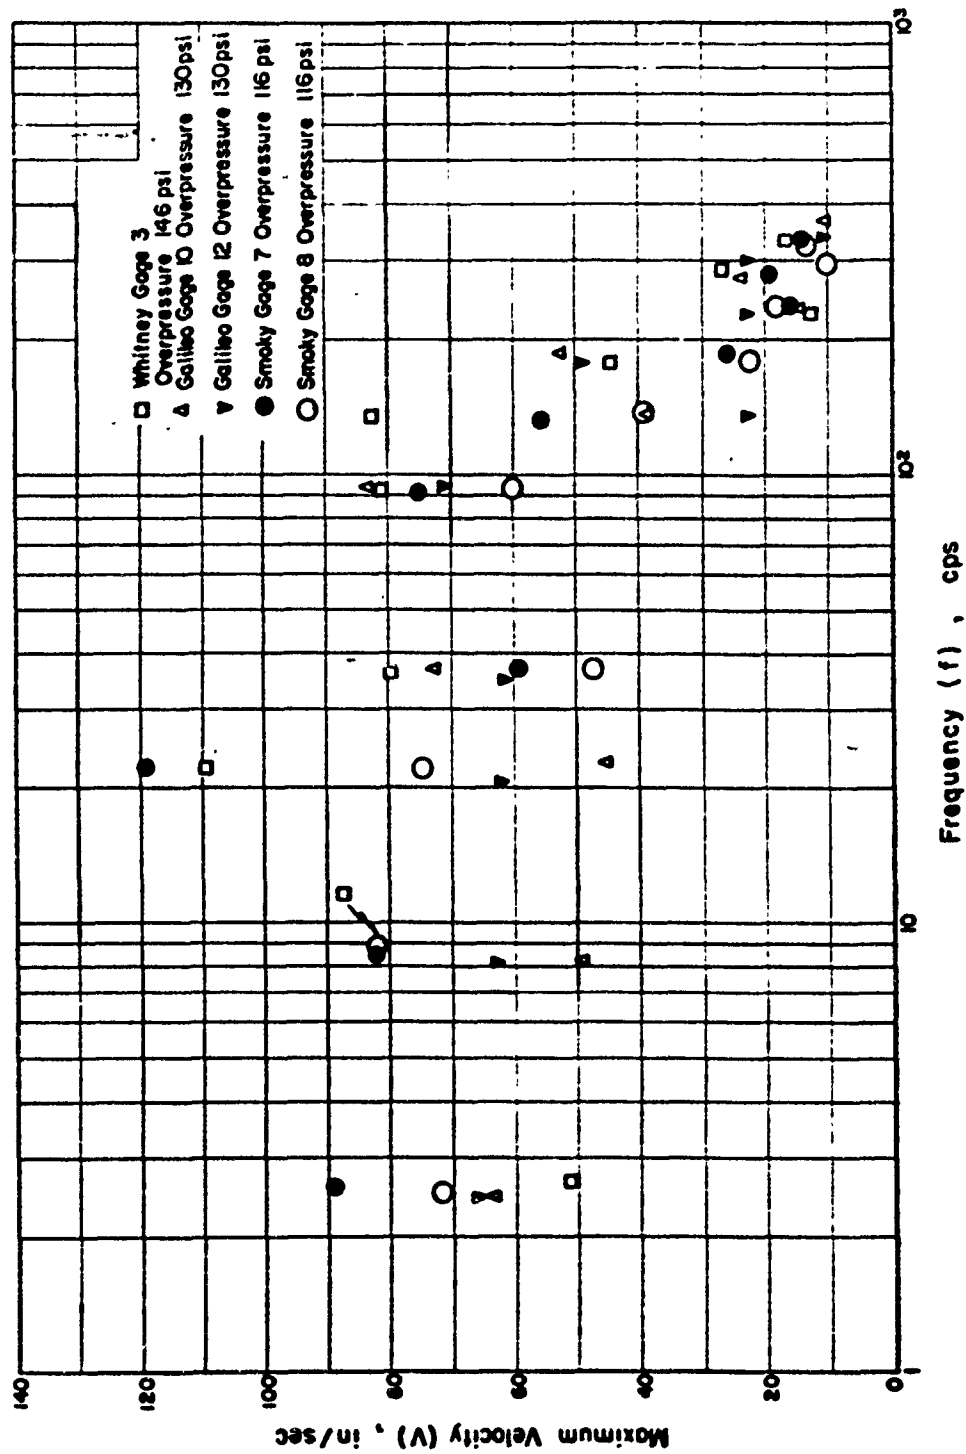


Figure 25 Velocity spectrum, vertical direction; Shot 5 Whitney, Galileo and Smoky.

CONFIDENTIAL

29

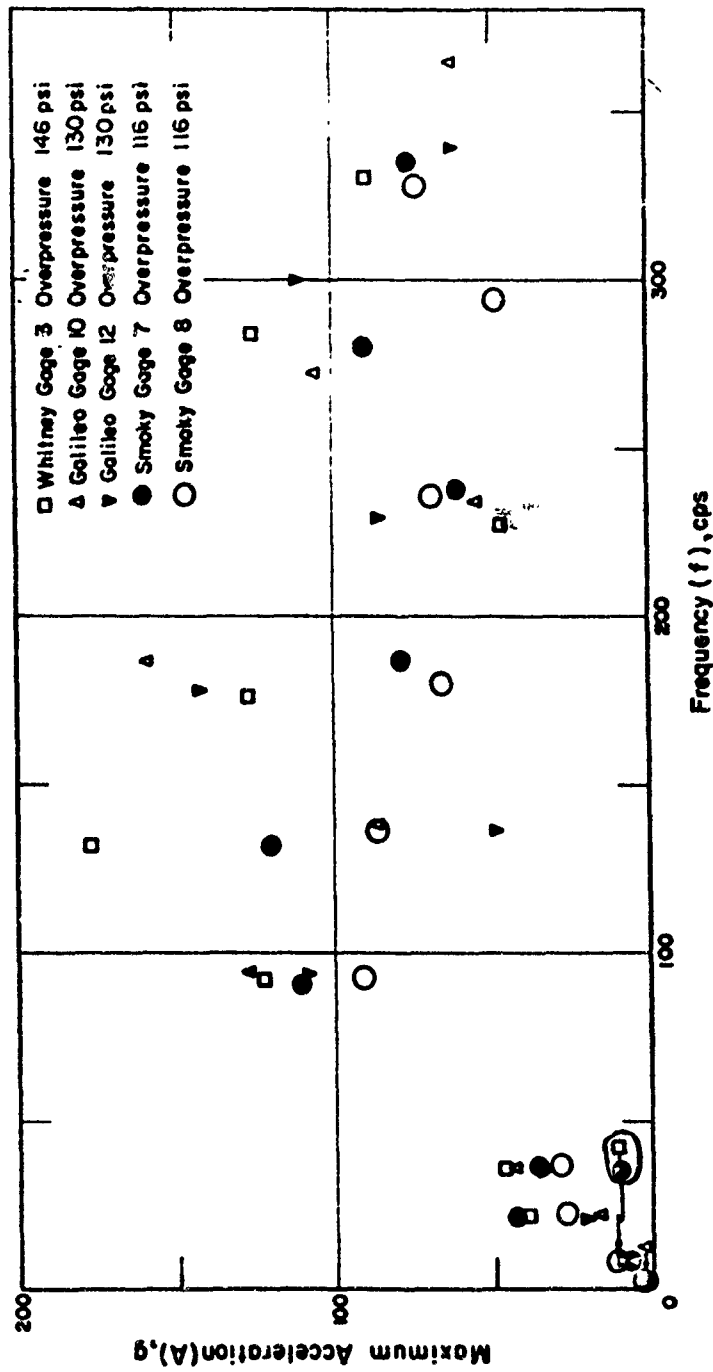


Figure 26 Acceleration spectrum, vertical direction; Shots Whitney, Galileo and Smoky.

a maximum at about 20 cps (Figure 25), and the accelerations peak between 140 to 160 cps (Figure 26). The radial component of the velocity indicated no clear peak (Figure 30), while the acceleration generally increased with frequency, (Figure 31). No generalizations are stated or implied by the foregoing remarks.

For single air blast pulses it can be shown that the maximum value of the acceleration

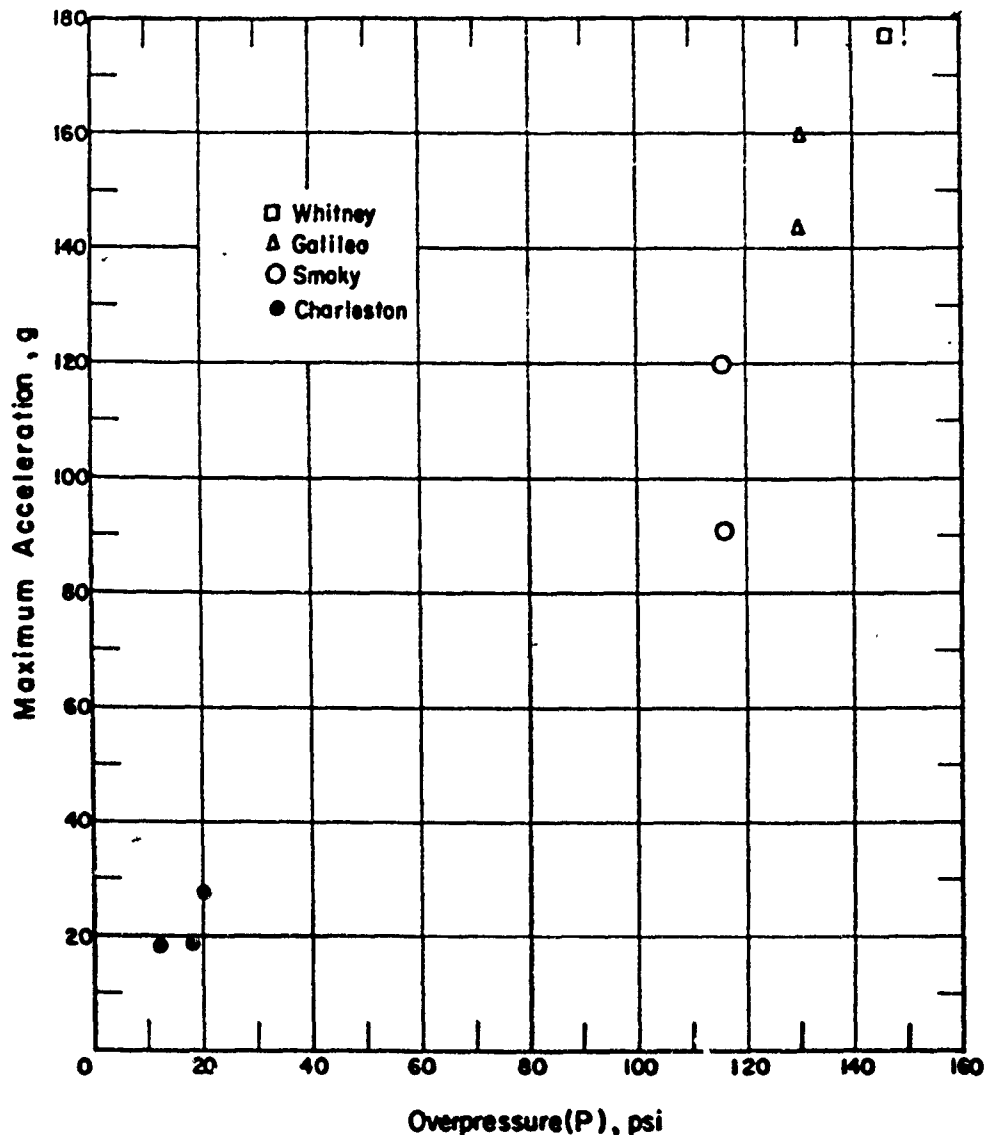


Figure 27 Maximum acceleration versus overpressure, vertical direction; Shots Whitney, Galileo, Smoky, and Charleston.

response is related to the rise time and the magnitude of the pulse. Assuming the rise time for all the shocks to be about the same, and that the magnitude of the shock is proportional to the overpressure, one would expect to find a linear relationship between peak acceleration and overpressure. That this is approximately true for the vertical motion is demonstrated in Figure 27.

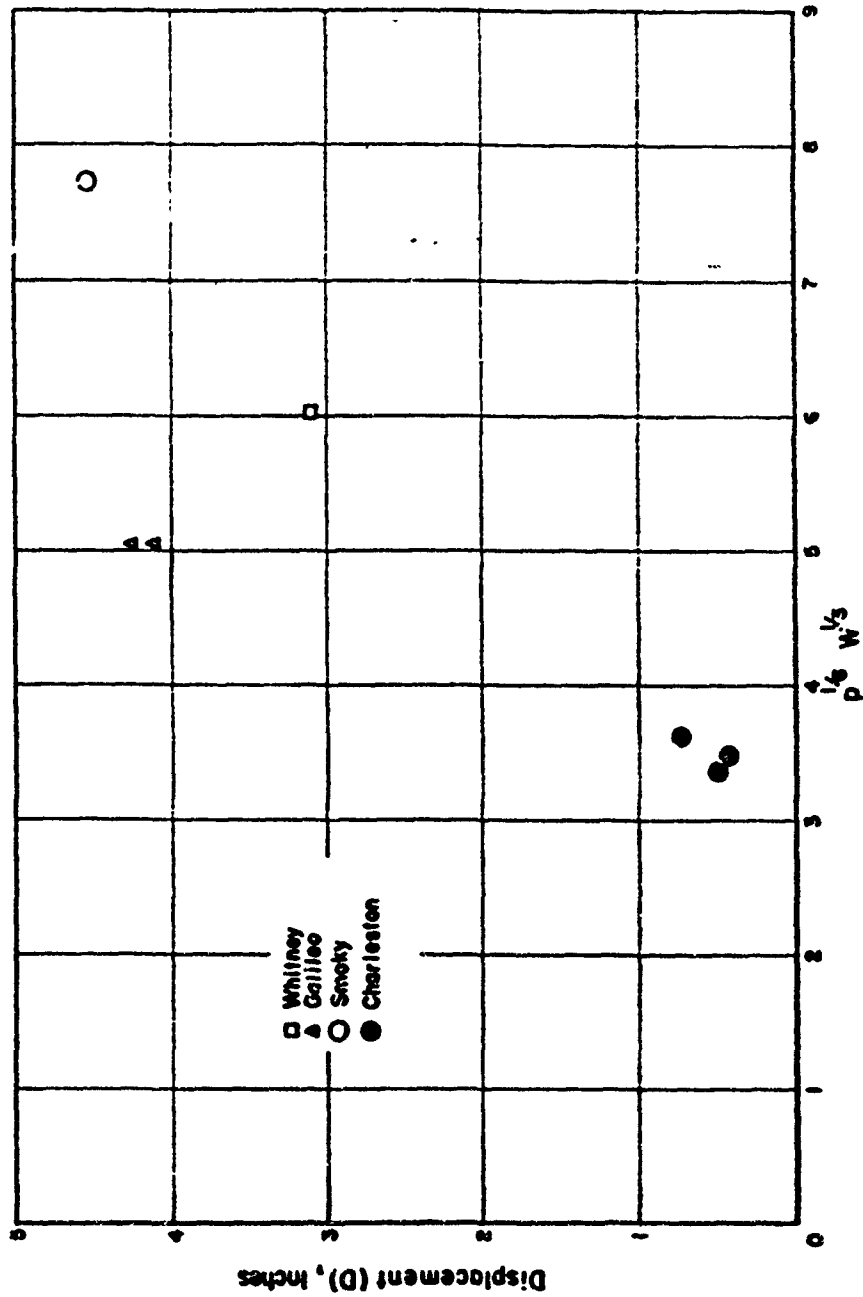


Figure 28 Displacement at 3 ops versus (Overpressure)^{1/6} (Yield)^{1/3}, vertical direction. Overpressure: p - psi. Yield: W - kilotons.

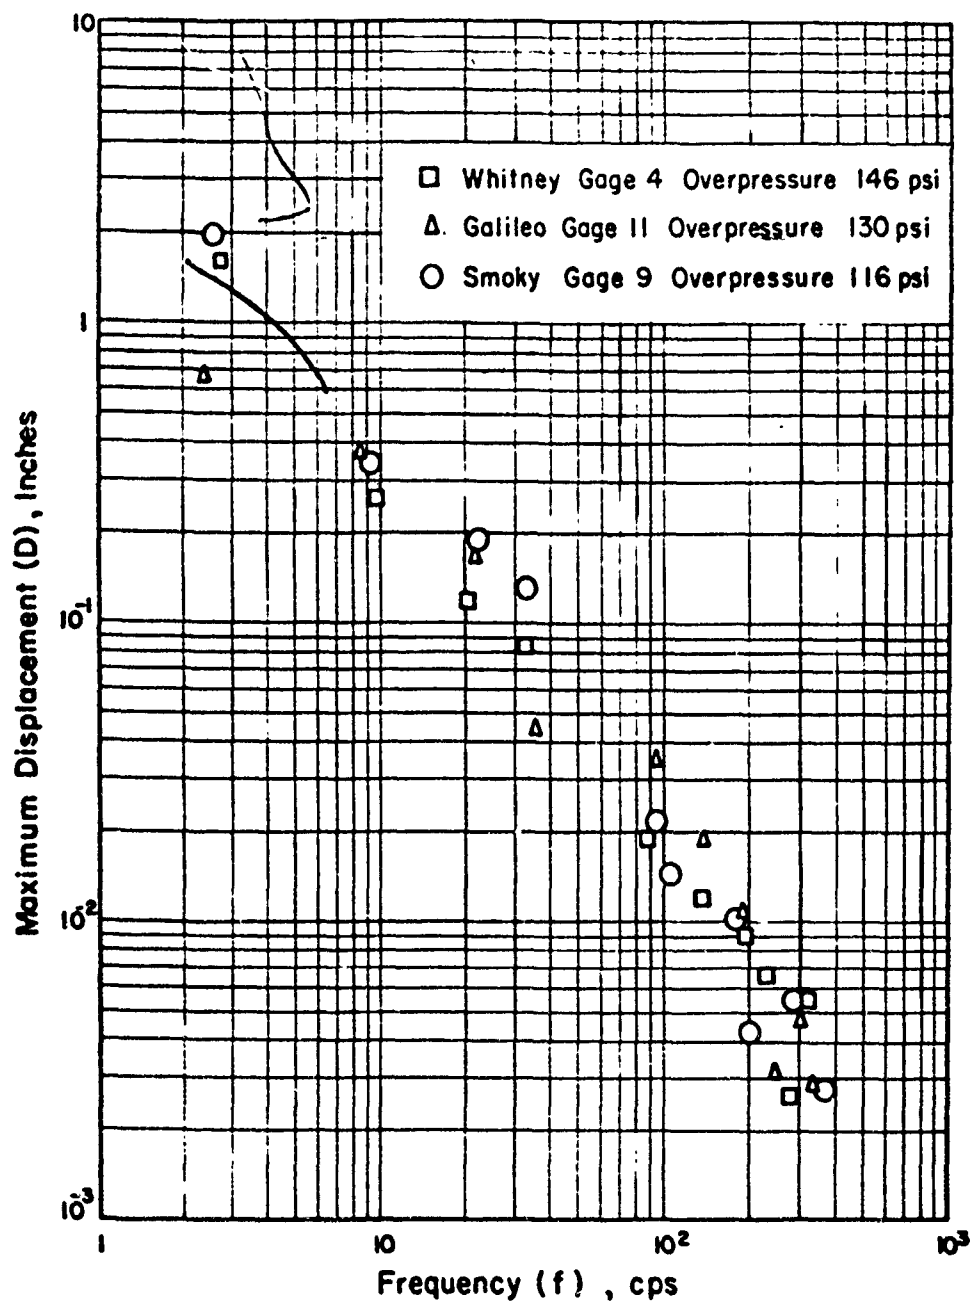


Figure 29 Displacement shock spectrum, radial direction; Shots Whitney, Galileo and Smoky, surface.

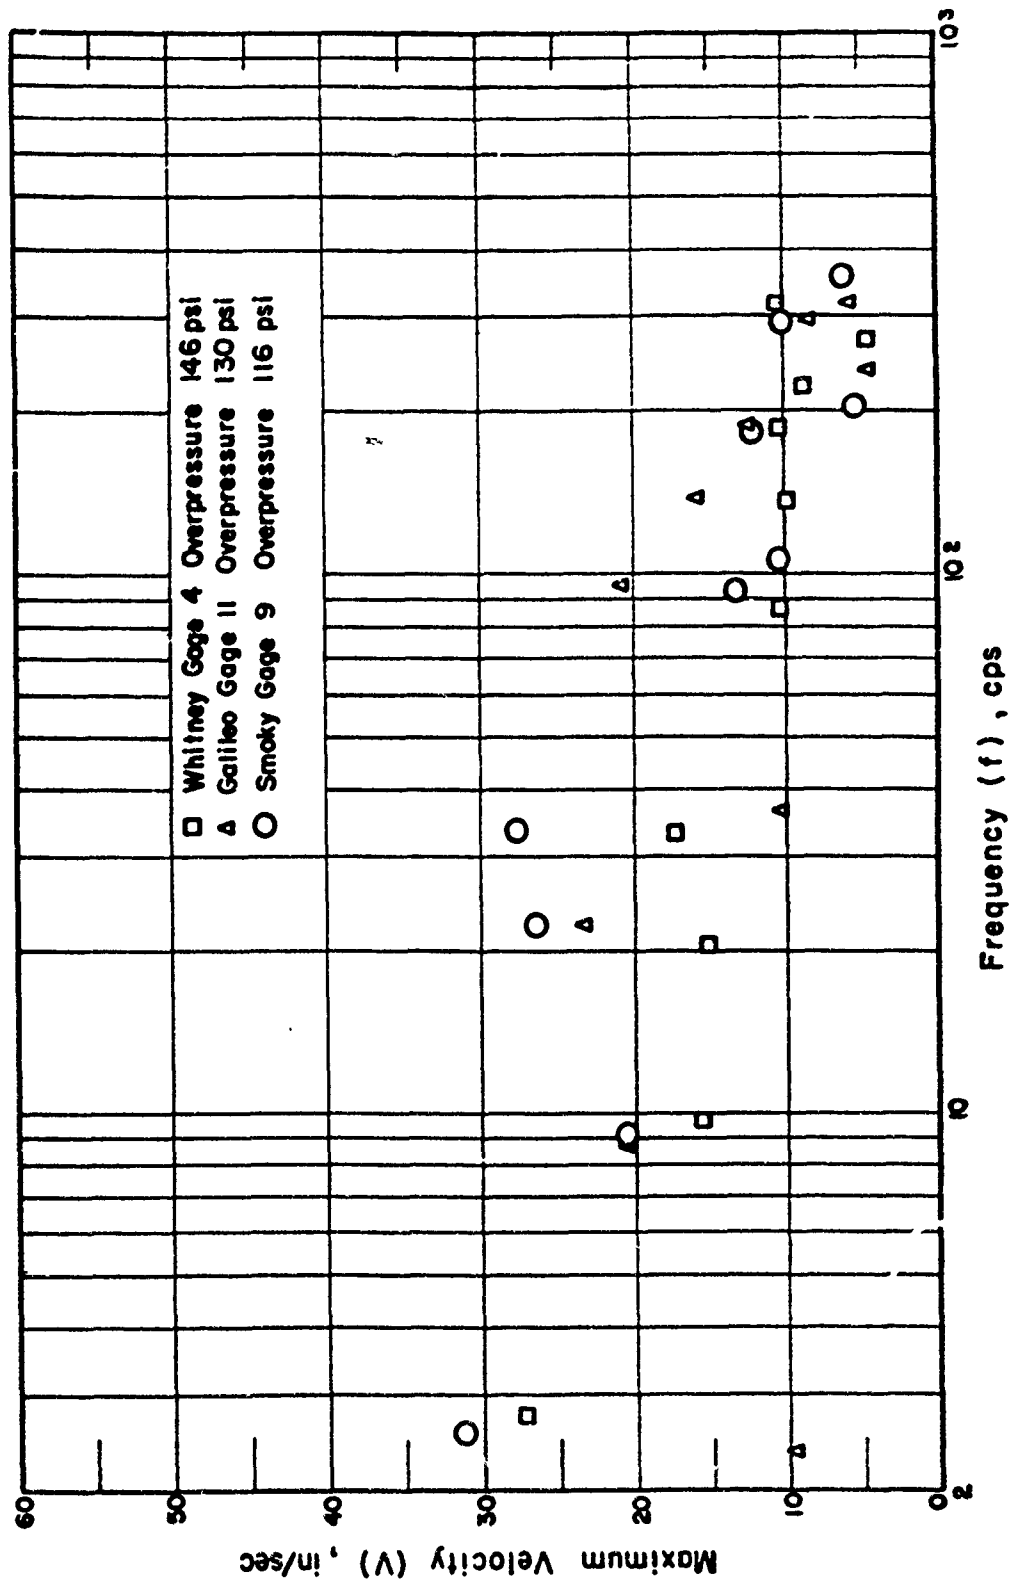


Figure 30 Velocity spectrum, radial direction; Shots Whitney, Galileo and Smoky.

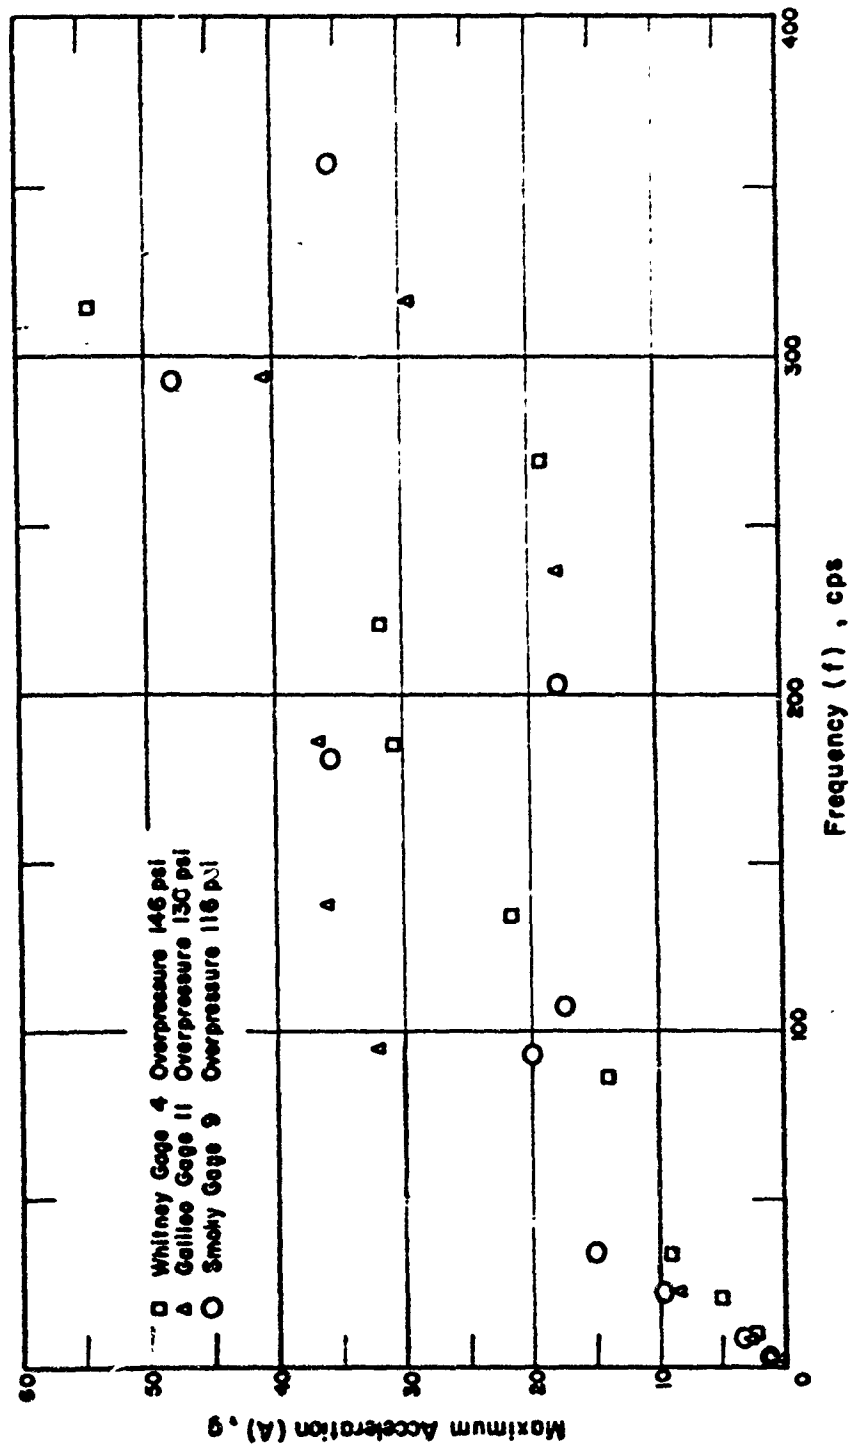


Figure 31 Acceleration spectrum, radial direction: Shots Whitney, Galileo and Smoky.

This correlation is less apparent for the radial component (Figure 32). It is known that for single pulse type inputs, the initial slope of the acceleration shock spectrum is proportional to the total impulse. It would therefore be expected that the displacement spectra for a low frequency (approaching zero) would be proportional to the total impulse. To investigate this possibility, it has been assumed that the total ground impulse is proportional to the one-overpressure impulse which can be shown to be proportional to $p^{1/6} W^{1/3}$, where p is the overpressure and W is the yield. The indecisive correlation is shown in Figures 28 and 33.

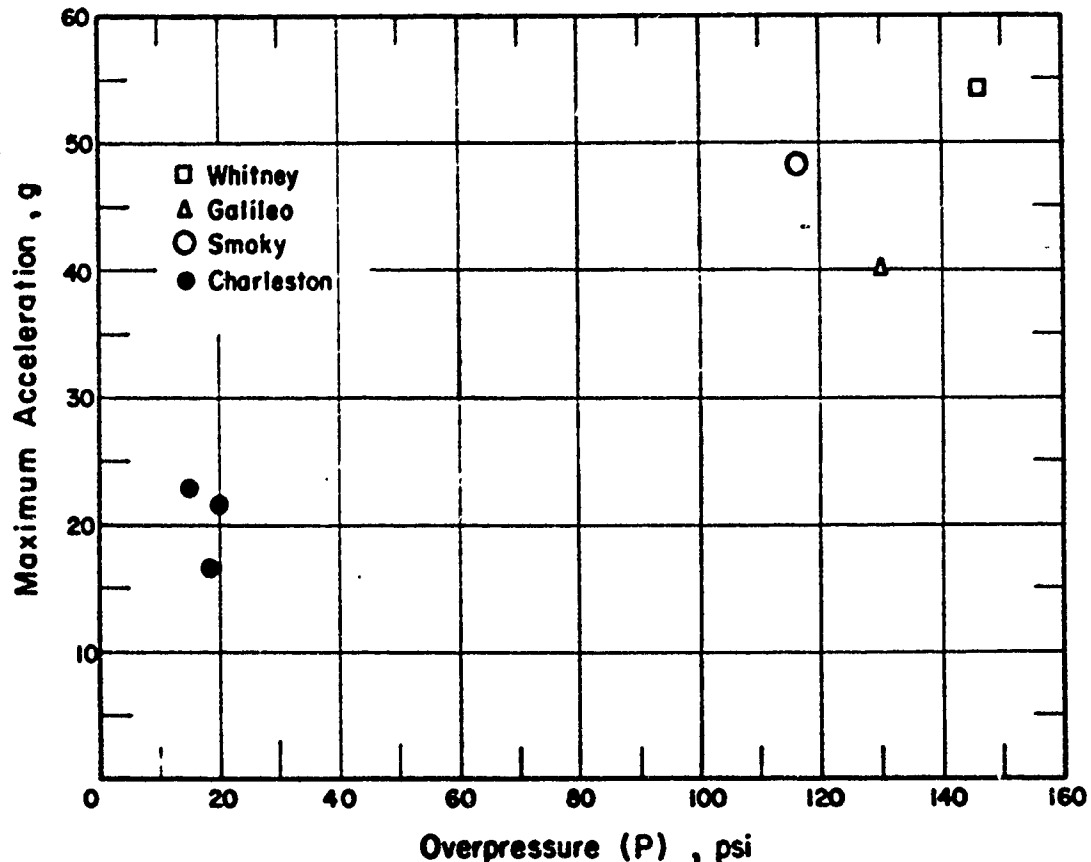


Figure 32 Maximum acceleration versus overpressure, radial direction; Shots Whitney, Galileo, Smoky, and Charleston.

CONCLUSIONS

The records obtained fulfilled the objectives of the project, i. e., the displacement shock spectra of ground shocks produced by nuclear devices was measured directly. The data appears to be quite reliable and is in a form that will enable a designer of structures to readily estimate stress and displacement responses (within the elastic limit) of structures, particularly those possessing low natural frequencies and a small amount of damping.

RECOMMENDATIONS

Reed-type gages should be used as primary instruments for measuring ground shock characteristics for a wide variety of soil, yield and other conditions. Whenever possible,

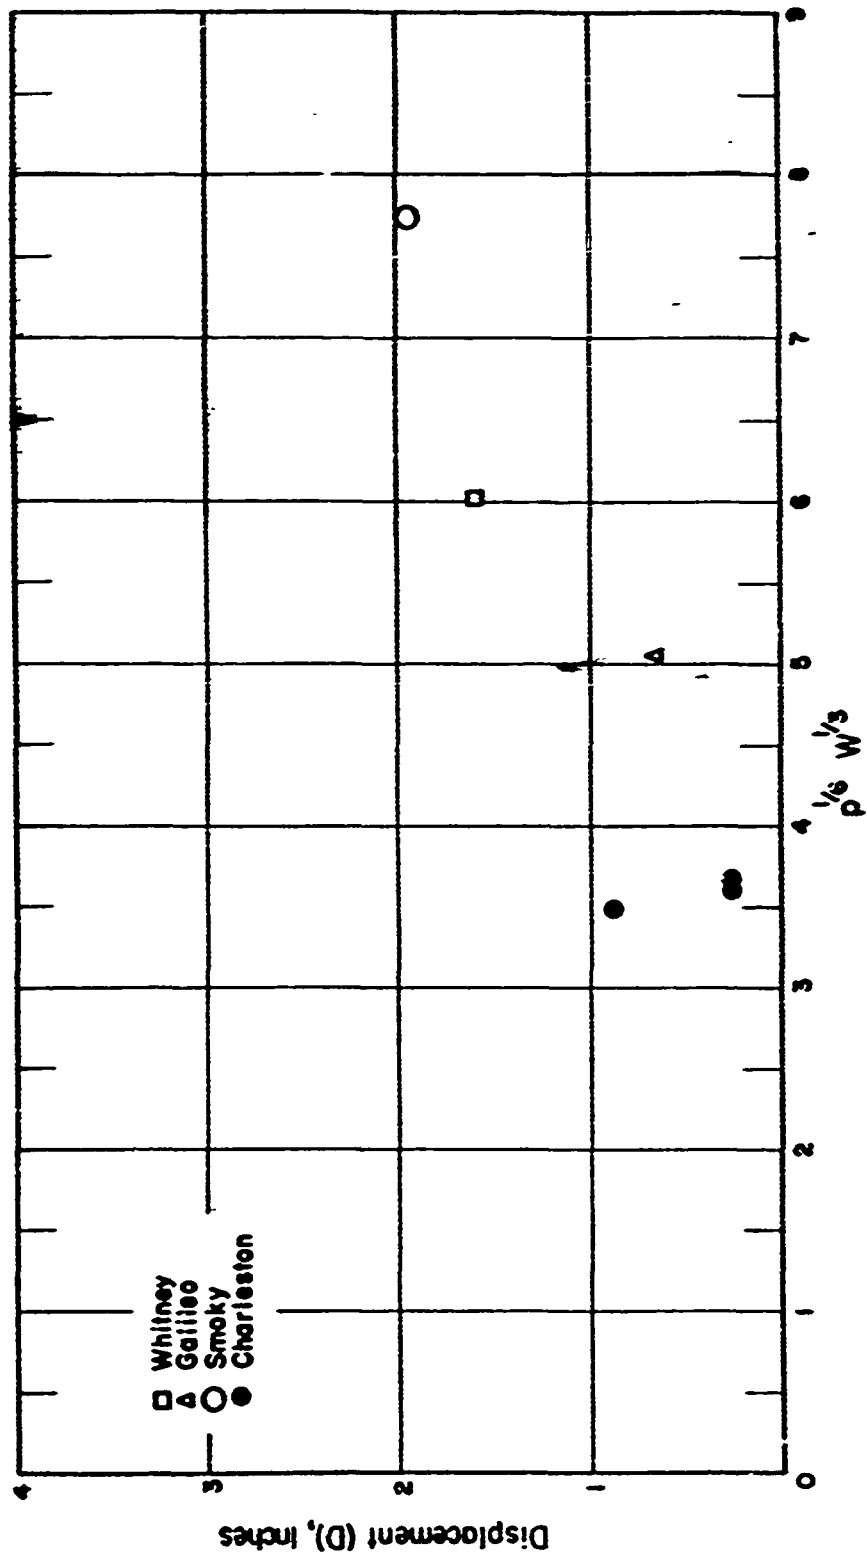


Figure 33 Displacement at 3 ops versus (Overpressure)^{1/3} (Yield)^{1/3}, radial direction. Overpressure: p - psi. Yield: W - kilotons.

correlations of shock-spectra measurements should be made with analyzed records of acceleration measurements.

REFERENCES

1. Y. C. Fung and M. V. Barton; "Some Characteristics and Uses of Shock Spectra"; GM-TR-82, The Ramo-Wooldridge Corporation; October 1956.
2. Y. C. Fung; "On the Safety of Structures Against Ground Shocks"; GM-TR-191, The Ramo-Wooldridge Corporation; 15 June 1957.
3. M. V. Barton; "Ground Shock Measurement and Structural Response"; GM-TR-293, The Ramo-Wooldridge Corporation; 11 December 1957.

DISTRIBUTION

Military Distribution Category 14

ARMY ACTIVITIES

- 1 Deputy Chief of Staff for Military Operations, D/A, Washington 25, D.C. ATTN: Dir. of S&M
- 2 Chief of Research and Development, D/A, Washington 25, D.C. ATTN: Atomic Div.
- 3 Assistant Chief of Staff, Intelligence, D/A, Washington 25, D.C.
- 4 Chief of Engineers, D/A, Washington 25, D.C. ATTN: ENGR
- 5 Chief of Engineers, D/A, Washington 25, D.C. ATTN: ENGR
- 6 Chief of Engineers, D/A, Washington 25, D.C. ATTN: ENGR
- 7-8 Office, Chief of Ordnance, D/A, Washington 25, D.C. ATTN: ENGR
- 9-11 Commanding General, U.S. Continental Army Command, Ft. Monroe, Va.
- 12 Director of Special Weapons Development Office, Headquarters COMUSC, Ft. Bliss, Tex. ATTN: Capt. Chester I. Peterson
- 13 President, U.S. Army Artillery Board, U.S. Continental Army Command, Ft. Sill, Okla.
- 14 President, U.S. Army Air Defense Board, U.S. Continental Army Command, Ft. Bliss, Tex.
- 15 Commandant, U.S. Army Command & General Staff College, Ft. Leavenworth, Kansas. ATTN: ARCHIVES
- 16 Commandant, U.S. Army Air Defense School, Ft. Bliss, Tex. ATTN: Dept. of Tactics and Combined Arms
- 17 Commandant, U.S. Army Armored School, Ft. Knox, Ky.
- 18 Commandant, U.S. Army Artillery and Missile School, Ft. Sill, Okla. ATTN: Combat Development Department
- 19 Commandant, U.S. Army Aviation School, Ft. Rucker, Ala.
- 20 Commandant, U.S. Army Infantry School, Ft. Benning, Ga. ATTN: C.D.S.
- 21 Commandant, U.S. Army Ordnance School, Aberdeen Proving Ground, Md.
- 22 Commandant, U.S. Army Ordnance and Guided Missile School, Redstone Arsenal, Ala.
- 23 Commanding General, Chemical Corps Training Command, Ft. McClellan, Ala.
- 24 Commanding General, The Engineer Center, Ft. Belvoir, Va. ATTN: Asst. Chmtr, Engr. School
- 25 Director, Armed Forces Institute of Pathology, Walter Reed Army Med. Center, 625 16th St., NW, Washington 25, D.C.
- 26 Commanding Officer, Army Medical Research Lab., Ft. Knox, Ky.
- 27 Commandant, Walter Reed Army Inst. of Res., Walter Reed Army Medical Center, Washington 25, D.C.
- 28-29 Commanding General, QM R&D Comd., QM R&D Ctr., Matich, Mass. ATTN: CSM Liaison Officer
- 30-31 Commanding Officer, Chemical Warfare Lab., Army Chemical Center, Md. ATTN: Tech. Library
- 32 Commanding General, Engineer Research and Dev. Lab., Ft. Belvoir, Va. ATTN: Chief, Tech. Support Branch
- 33 Director, Waterways Experiment Station, P.O. Box 631, Vicksburg, Miss. ATTN: Library
- 34 Commanding Officer, Picatinny Arsenal, Dover, N.J. ATTN: CDR&D-IE
- 35 Commanding Officer, Diamond Ordn. Fuse Labs., Washington 25, D.C. ATTN: Chief, Nuclear Vulnerability Br. (230)
- 36-37 Commanding General, Aberdeen Proving Grounds, Md. ATTN: Director, Ballistics Research Laboratory
- 38 Commander, Army Rocket and Guided Missile Agency, Redstone Arsenal, Ala. ATTN: Tech. Library
- 39 Commanding General, White Sands Proving Ground, Las Cruces, N. Mex. ATTN: CDR&D-OM
- 40 Commander, Army Ballistic Missile Agency, Redstone Arsenal, Ala. ATTN: CDR&D-RT
- 41 Commanding General, U.S. Army Electronics Proving Ground, Ft. Huachuca, Ariz. ATTN: Tech. Library

- 42 Commanding General, USA Combat Surveillance Agency, 1124 N. Highland St., Arlington, Va.
- 43 Director, Operations Research Office, Johns Hopkins University, 6935 Arlington Rd., Bethesda 14, Md.
- 44 Commander-in-Chief, U.S. Army Europe, APO 403, New York, N.Y. ATTN: Oper. Div., Weapons Br.

NAVY ACTIVITIES

- 45 Chief of Naval Operations, D/N, Washington 25, D.C. ATTN: OP-0380
- 46 Chief of Naval Operations, D/N, Washington 25, D.C. ATTN: OP-36
- 47-48 Chief of Naval Research, D/N, Washington 25, D.C. ATTN: Code 811
- 49-50 Chief, Bureau of Aeronautics, D/N, Washington 25, D.C.
- 51 Chief, Bureau of Ordnance, D/N, Washington 25, D.C.
- 52 Chief, Bureau of Ships, D/N, Washington 25, D.C. ATTN: Code 423
- 53 Chief, Bureau of Yards and Docks, D/N, Washington 25, D.C. ATTN: D-440
- 54 Director, U.S. Naval Research Laboratory, Washington 25, D.C. ATTN: Mrs. Katherine M. Case
- 55-56 Commander, U.S. Naval Ordnance Laboratory, White Oak, Silver Spring 19, Md.
- 57 Commanding Officer and Director, Navy Electronics Laboratory, San Diego 32, Calif.
- 58 Commanding Officer, U.S. Naval Mine Defense Lab., Panama City, Fla.
- 59-60 Commanding Officer, U.S. Naval Radiological Defense Laboratory, San Francisco, Calif. ATTN: Tech. Info. Div.
- 61-63 Officer-in-Charge, U.S. Naval Civil Engineering N&E Lab., U.S. Naval Construction Bn. Center, Fort Buena, Calif. ATTN: Code 753
- 64 Commanding Officer, U.S. Naval Schools Command, U.S. Naval Station, Treasure Island, San Francisco, Calif.
- 65 Superintendent, U.S. Naval Postgraduate School, Monterey, Calif.
- 66 Officer-in-Charge, U.S. Naval School, CEC Officers, U.S. Naval Construction Bn. Center, Fort Buena, Calif.
- 67 Commanding Officer, Nuclear Weapons Training Center, Atlantic, U.S. Naval Base, Norfolk 11, Va. ATTN: Nuclear Warfare Dept.
- 68 Commanding Officer, Nuclear Weapons Training Center, Pacific, Naval Station, San Diego, Calif.
- 69 Commanding Officer, U.S. Naval Damage Control Training Center, Naval Base, Philadelphia 12, Pa. ATTN: ABC Defense Course
- 70 Director, Naval Air Experiment Station, Air Material Center, U.S. Naval Base, Philadelphia, Pa.
- 71 Commander, Officer U.S. Naval Air Development Center, Johnsville, Pa. ATTN: NAS, Librarian
- 72 Commanding Officer, U.S. Naval Medical Research Institute, National Naval Medical Center, Bethesda, Md.
- 73 Commanding Officer and Director, David W. Taylor Model Basin, Washington 7, D.C. ATTN: Library
- 74 Commanding Officer and Director, U.S. Naval Engineering Experiment Station, Annapolis, Md.
- 75 Commander, Norfolk Naval Shipyard, Portsmouth, Va. ATTN: Underwater Explosions Research Division
- 76-79 Commandant, U.S. Marine Corps, Washington 25, D.C. ATTN: Code AQ3H
- 80 Commanding Officer, U.S. Naval CIC School, U.S. Naval Air Station, Glynnco, Brunswick, Ga.

UNCLASSIFIED

AIR FORCE ACTIVITIES

- 51 Assistant for Atomic Energy, HQ, USAF, Washington 25, D.C. ATTN: DCS/D
- 52 Deputy Chief of Staff, Operations HQ, USAF, Washington 25, D.C. ATTN: Operations Analysis
- 83-84 Assistant Chief of Staff, Intelligence, HQ, USAF, Washington 25, D.C. ATTN: AFICIS-3B
- 85 Director of Research and Development, DCS/D, HQ, USAF, Washington 25, D.C. ATTN: Guidance and Weapons Div.
- 86 The Surgeon General, HQ, USAF, Washington 25, D.C. ATTN: Bio-Def. Pres. Med. Division
- 87 Commander-in-Chief, Strategic Air Command, Offutt AFB, Neb. ATTN: CANS
- 88 Commander, Tactical Air Command, Langley AFB, Va. ATTN: Doc. Security Branch
- 89 Commander, Air Defense Command, Ent AFB, Colorado. ATTN: Atomic Energy Div., ALCAN-A
- 90 Commander, Air Force Ballistic Missile Div. HQ, AFMCD, Air Force Unit Post Office, Los Angeles 45, Calif. ATTN: WISOT
- 91 Commander, HQ, Air Research and Development Command, Andrews AFB, Washington 25, D.C. ATTN: ECWA
- 92-93 Commander, AF Cambridge Research Center, L. G. Emmons Field, Bedford, Mass. ATTN: CR&ST-2
- 94-98 Commander, Air Force Special Weapons Center, Kirtland AFB, Albuquerque, N. Mex. ATTN: Tech. Info. & Intel. Div.
- 99-100 Director, Air University Library, Maxwell AFB, Ala.
- 101 Commander, Lowry AFB, Denver, Colorado. ATTN: Dept. of Sp. Wpns. Tsg.
- 102 Commandant, School of Aviation Medicine, USAF, Randolph AFB, Tex. ATTN: Research Secretariat
- 103 Commander, 1009th Sp. Wpns. Squadron, HQ, USAF, Washington 25, D.C.
- 104-106 Commander, Wright Air Development Center, Wright-Patterson AFB, Dayton, Ohio. ATTN: WCCSI
- 107-108 Director, USAF Project RAND, VIA: USAF Liaison Office, The RAND Corp., 1700 Main St., Santa Monica, Calif.
- 109 Commander, Rose Air Development Center, ARDC, Griffiss AFB, N.Y. ATTN: The Documents Library, NCSSLD
- 110 Assistant Chief of Staff, Intelligence, HQ, USAF, APO 633, New York, N.Y. ATTN: Directorate of Air Targets

- 111 Commander-in-Chief, Pacific Air Force, APO 923, San Francisco, Calif. ATTN: PACICIS-3B, Data Recovery

OTHER DEPARTMENT OF DEFENSE ACTIVITIES

- 112 Director of Defense Research and Engineering, Washington 25, D.C. ATTN: Tech. Library
- 113 Chairman, Armed Services Explosives Safety Board, Building 5-7, Gravelly Point, Washington 25, D.C.
- 114 Director, Weapons Systems Evaluation Group, RMA 12300, The Pentagon, Washington 25, D.C.
- 115-122 Chief, Defense Atomic Support Agency, Washington 25, D.C.
- 123 Commander, Field Command, DASA, Sandia Base, Albuquerque, N. Mex.
- 124 Commander, Field Command, DASA, Sandia Base, Albuquerque, N. Mex. ATTN: FCTD
- 125-129 Commander, Field Command, DASA, Sandia Base, Albuquerque, N. Mex. ATTN: FCTD
- 130 Commander, JTF-7, Arlington Hall Station, Arlington 12, Va.
- 131 U.S. Documents Officer, Office of the United States National Military Representative - SSAFE, APO 55, New York, N.Y.

ATOMIC ENERGY COMMISSION ACTIVITIES

- 132-134 U.S. Atomic Energy Commission, Technical Library, Washington 25, D.C. ATTN: For DPA
- 135-136 Los Alamos Scientific Laboratory, Report Library, P.O. Box 1663, Los Alamos, N. Mex. ATTN: Elen Reiman
- 137-141 Sandia Corporation, Classified Document Division, Sandia Base, Albuquerque, N. Mex. ATTN: H. J. Jayth, Jr.
- 142-144 University of California Lawrence Radiation Laboratory, P.O. Box 308, Livermore, Calif. ATTN: Clovis G. Craig
- 145 Weapon Data Section, Technical Information Service Extension, Oak Ridge, Tenn.
- 146-150 Technical Information Service Extension, Oak Ridge, Tenn. (Surplus)

UNCLASSIFIED